

commodore

**Multi-Function
Preprogrammed
Rechargeable
Scientific Notation
Calculator**

SR 9190R

**PULL TAB FOR PRACTICE USE
DO NOT PULL TAB FOR ACTUAL USAGE**

OWNER'S MANUAL

TABLE OF CONTENTS


DESCRIPTION	PAGE
INTRODUCTION	
I. KEYBOARD LAYOUT AND KEY INDEX	8
II. OPERATING INSTRUCTIONS -- FUNDAMENTAL	9
1. Power on	9
2. Display Format	9
3. Numerical Entry	10
4. \boxed{F} and $\boxed{\text{inv}}$ keys	10
5. Clearing --	11
a. To Clear an Erroneous Entry	
b. To Clear a Calculation	
c. To Clear the Memory registers	
d. To Clear the Calculator	
6. Simple Arithmetic	11
7. Chained Calculations	12
8. Parenthesis	13
9. Single Variable Functions x^2 , \sqrt{x} , $1/x$, \ln , e^x , \log , 10^x , π \sin , \cos , \tan , and inverses	17
10. Functions of Two Variables y^x , $x\sqrt{y}$, $x \times y$	18
11. Degree-Radian Conversion and Mode	20
12. Conversions	20
13. Memory Registers and Memory Functions	22
III. OPERATING-INSTRUCTIONS-SPECIAL FUNCTIONS	26
1. Rectangular/Polar Conversions	26
2. Hour-Minute Seconds Function	27

III. OPERATING-INSTRUCTIONS-SPECIAL FUNCTIONS

PAGE		
3. Natural Log of Gamma Function	28	
4. Hyperbolic Functions and their Inverses	29	
5. Numerical Integration	30	
6. Complex Arithmetic	32	
7. % and $\Delta\%$	34	
IV. OPERATING INSTRUCTIONS – STATISTICAL FUNCTIONS	34	
1. Permutation and Combination	34	
2. Poisson Density Function	35	
3. Binomial Density Function	36	
4. Gaussian Probability Distribution	37	
5. Linear Regression	37	
6. Mean and Standard Deviation	43	
7. General Curve Fitting	46	
V. APPLICATIONS – EXAMPLES	47	
VI. APPENDIX	72	
A. Error Conditions	72	
B. Operating Accuracy	73	
C. Probability Distribution Laws	74	
D. Useful Formulae and Relationships	75	
E. International Symbols, Conversions & Constants	81	
F. Battery and AC Adaptor/Charger Operation	88	
G. Sales and Service Centres.	90	
I. KEYBOARD LAYOUT AND INDEX		
KEY	PAGE	
ON $\boxed{\square}$ OFF	Power Switch	9
\boxed{EE}	Exponent Mode	9

KEY	DESCRIPTION	PAGE	KEY	DESCRIPTION	PAGE
	Mantissa Mode	10		Anti-logarithm to the Base e, or Exponential Function	
	X Exchange Y	19			17
	Factorial	18		Permutation	34
	Natural Log of Gamma	28		Combination	34
	Hours Min Sec Mode	27		Rectangular to Polar Conversion	26
	Inverse Key	10		Polar to Rectangular Conversion	27
	Sine	18		Numerical Integration	30
	Cosine	18		Binomial Density Function	36
	Tangent	18		Mean	43
	Hyperbolic Sine	29		Unbiased Standard Deviation	43
	Hyperbolic Cosine	29		Will give fitted value for corresponding Y.	38
	Hyperbolic Tangent	29		Will give fitted value for Corresponding X.	38
	Upper Function Control Key	10		Y Entry for Linear Regression	38
	a number y to the power x.	18		X Entry for Linear Regression	38
	a number y to the root x	19		Y Intercept of the Equation Line	41
	Square of a Number	17		The Slope of the Equation Line	41
	Square Root of a Number	17		For entering data for mean and Std. Deviation	44
	Logarithm to the Base Ten	17			
	Anti-Logarithm to the Base ten	17			
	Natural Logarithm to the Base e	17			

KEY	DESCRIPTION	PAGE	KEY	DESCRIPTION	PAGE
	Biased Standard Deviation	43		Simple Arithmetic (real numbers)	11
	Parameter for Binomial and Gaussian Distributions				
	Permutations and Combinations.	35		Complex Arithmetic	32
	Parameter for Combination Permutation, Binomial, Gaussian and Poisson Distributions	35			
	Poisson Density Function	35		Equals or complete calculation	12
	Gaussian Distribution Function	37		Number Entry	10
	Store Display in User Memory	22			
	Exchange User Memory n with Display	22		Decimal point entry	10
	Recall User Memory n	22		Change Sign Key	10
	Sum X _i In User Memory n	22		Automatic entry of Pi	
	Product X _i in User Memory n	22		Unit Conversions	20
	Open Parentheses	13		(°F) °C (d) dms	
	Close Parentheses	13		(d) gra (gal)	
	Percent Discount, Add on	34		(oz) g (lb)kg	
	Percent Difference	34		(ft)m (mi)km	
	Reciprocal	17		(fl.oz) l (in)cm	
	Degree-Radian Conversion and Mode	20		BTU (J)	

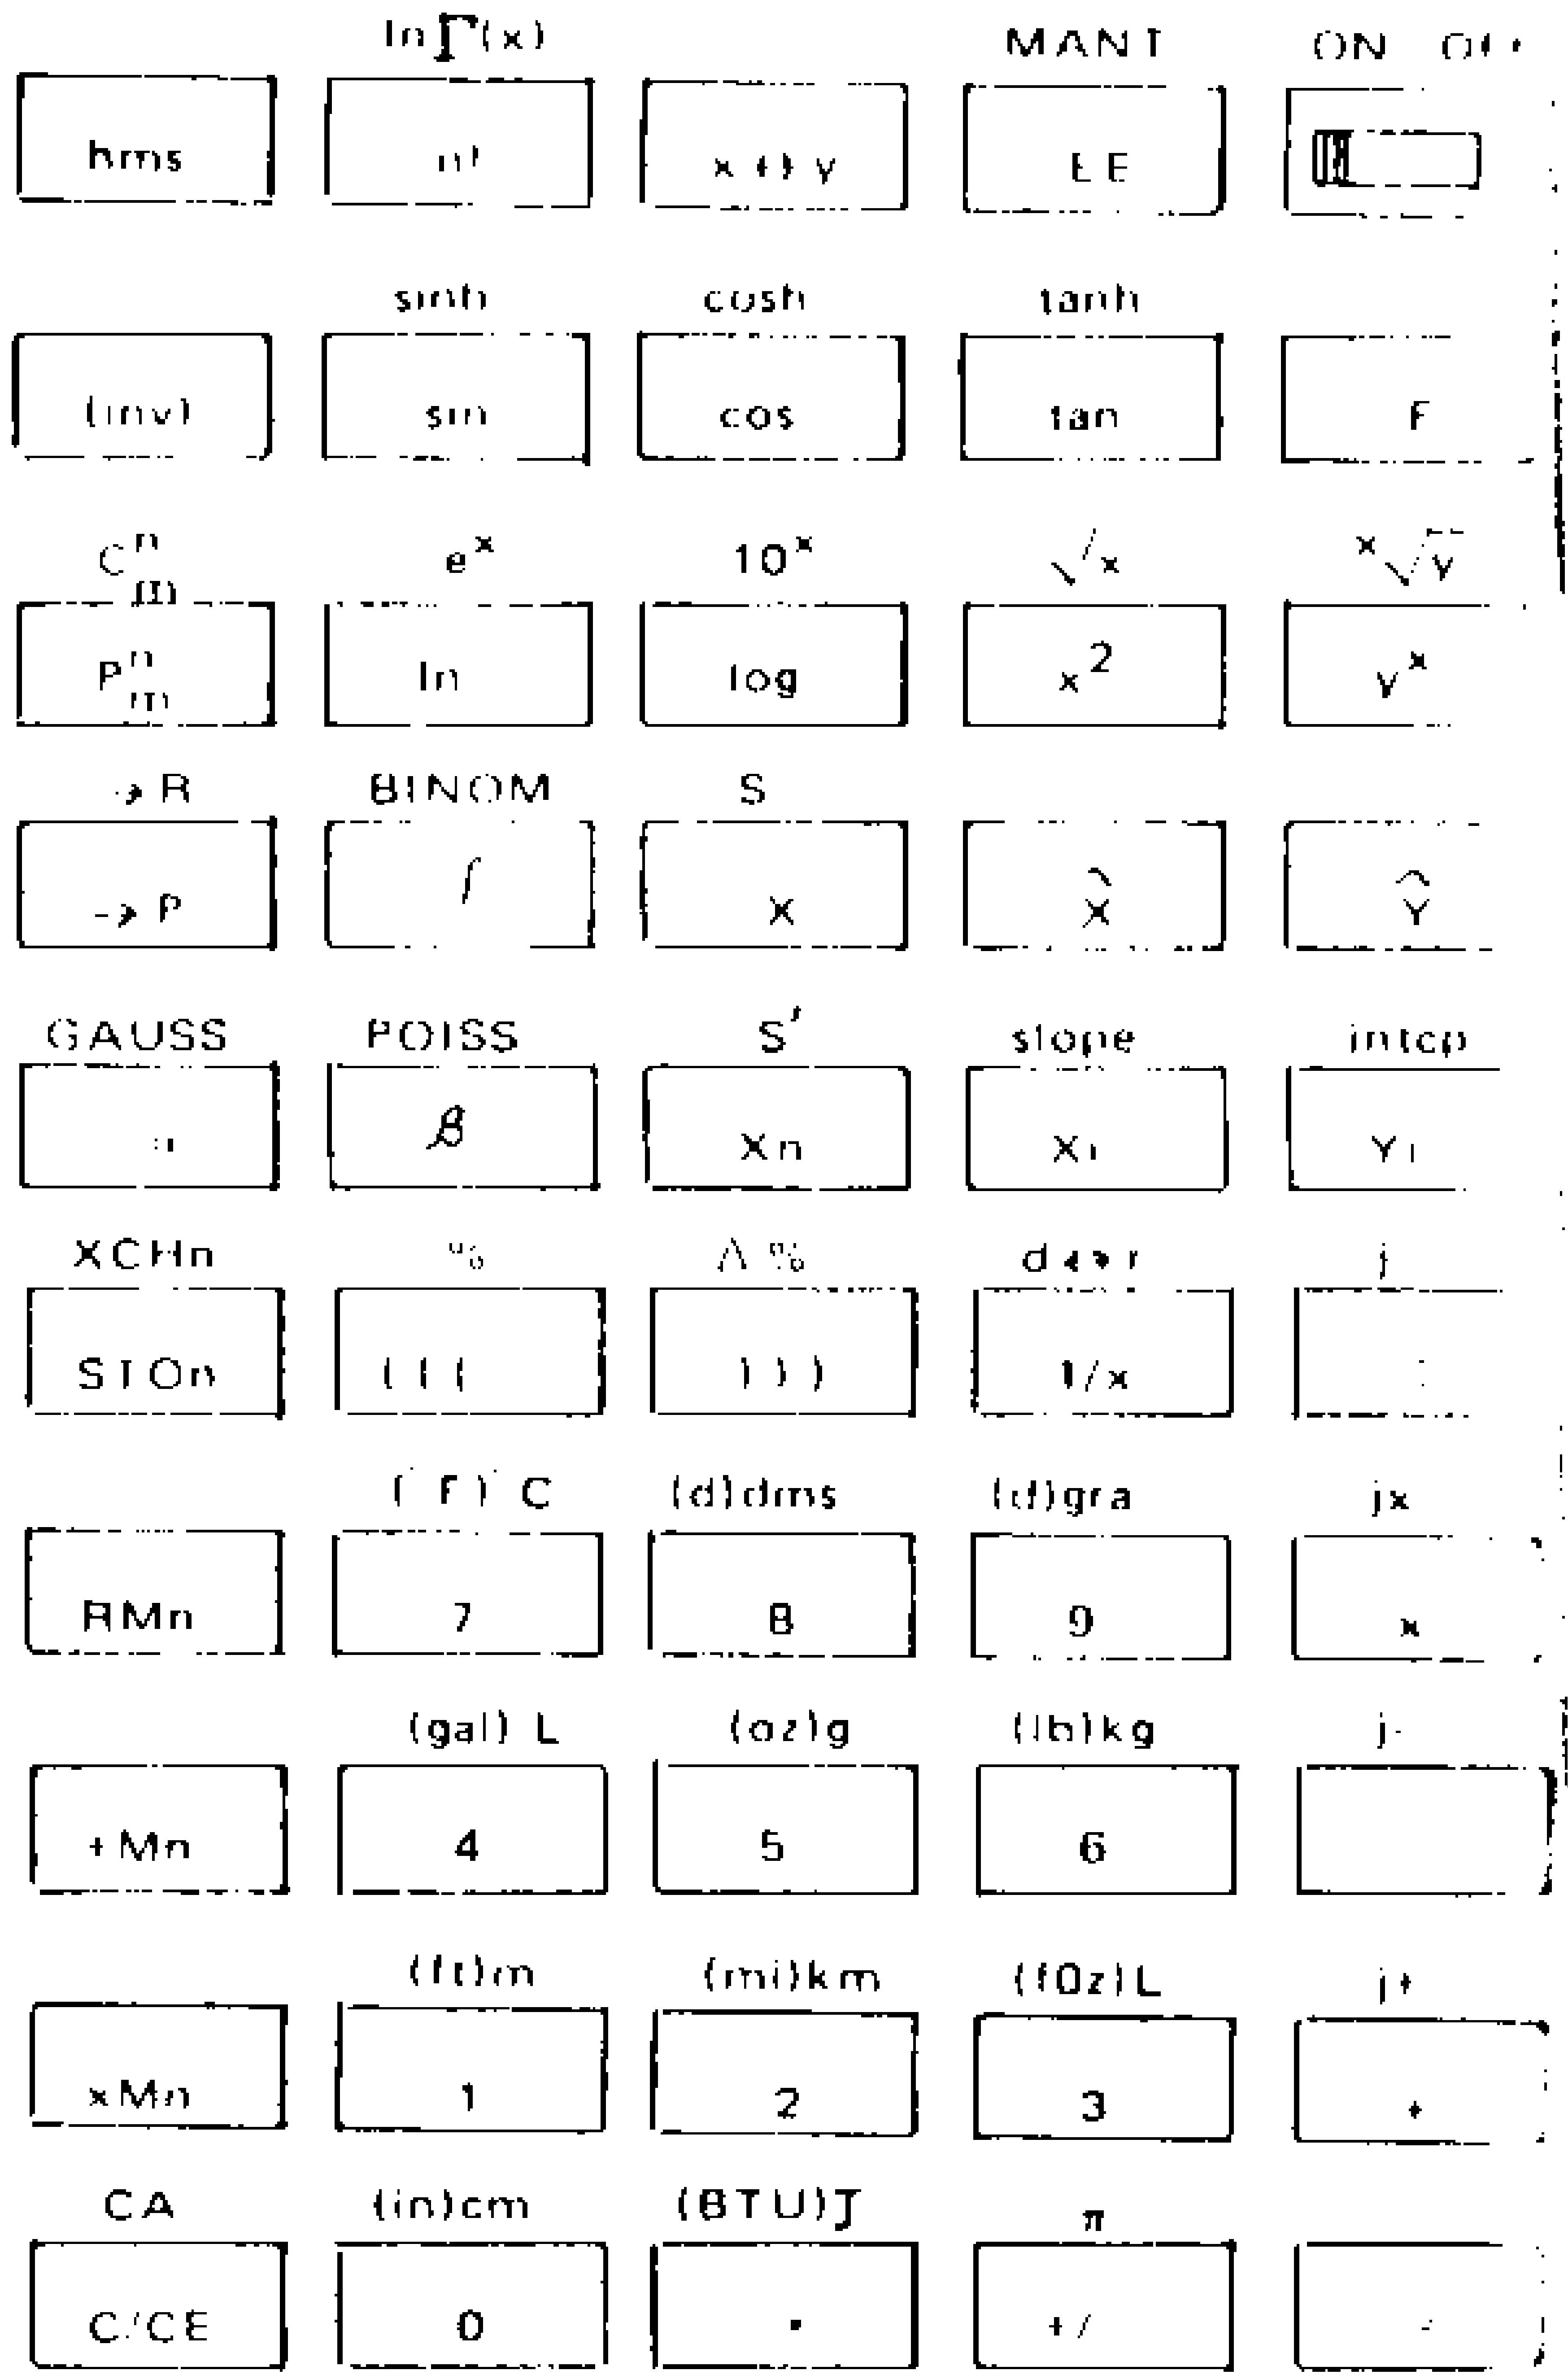

KEYBOARD LAYOUT

OPERATING INSTRUCTIONS – FUNDAMENTAL


1. Power On

To switch on the calculator, move the switch to the left. Zero in display indicates that power is on.

2. Display Format

At most, fourteen digits (including signs) can be displayed on your calculator.

Sample display:

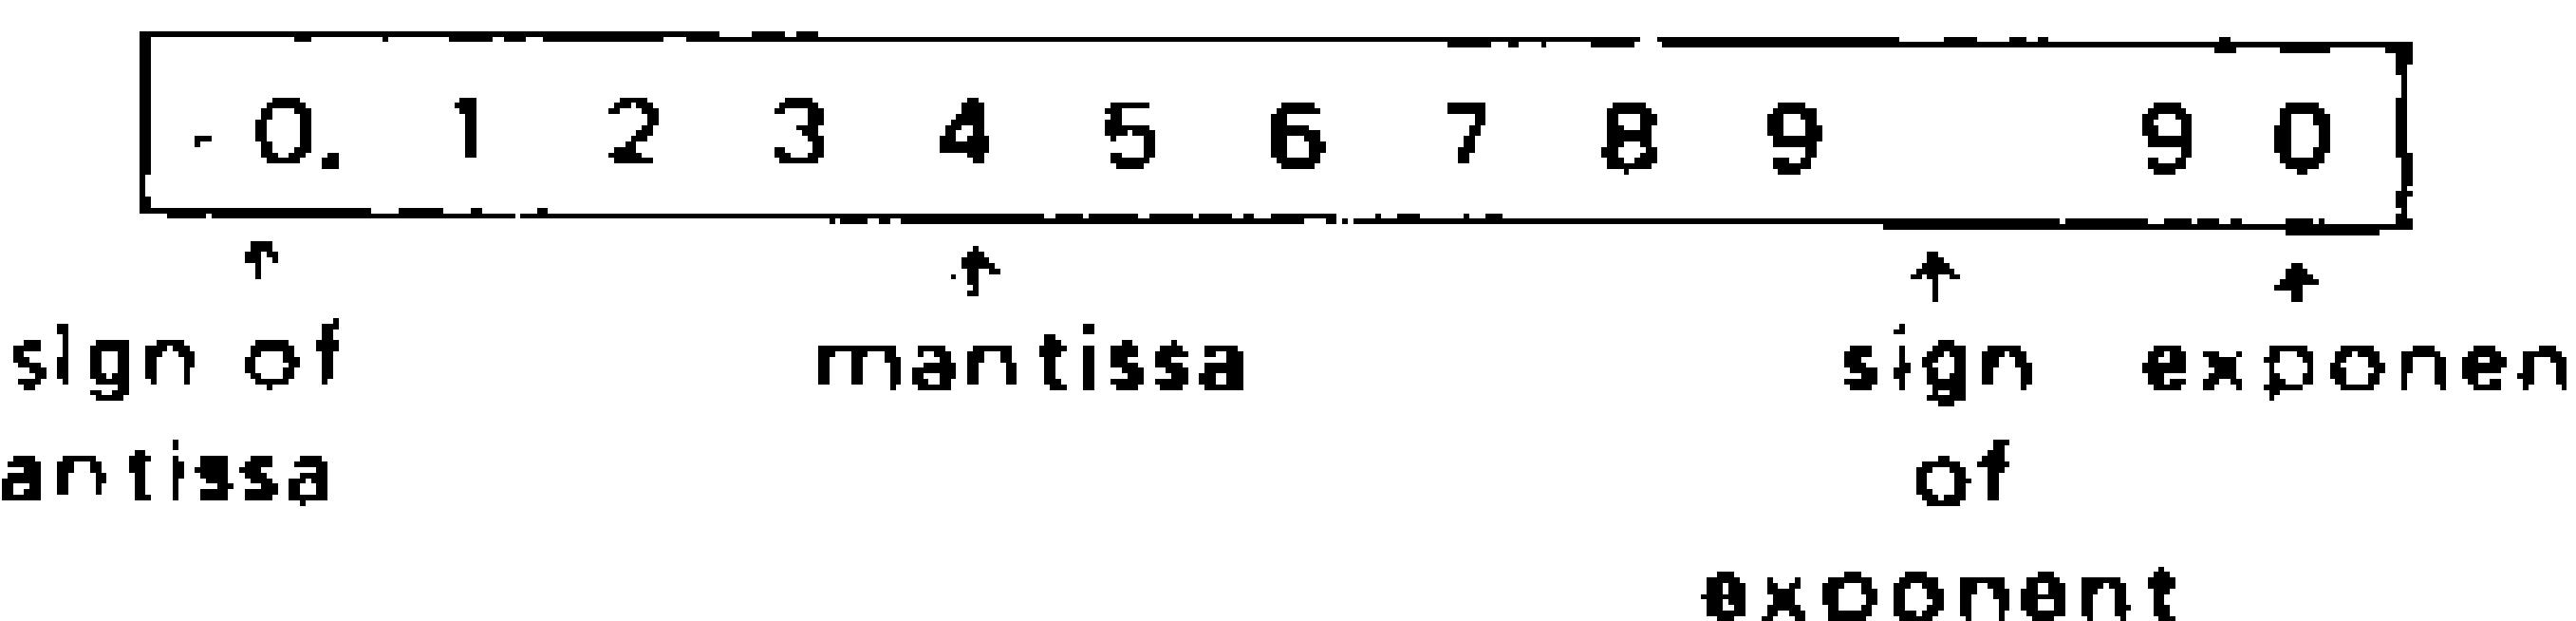


The mantissa is a maximum of ten digits with or without a decimal point. The sign of the mantissa is positive if the mantissa field is blank and negative if the mantissa field contains a “–” sign.

The exponent is a maximum of two digits. The sign of the exponent is positive if the exponent field is blank and negative if the exponent field contains a “–” sign.

Your calculator has two display dot indicators, one (left end of display) to indicate the upper function key mode, and the other (right of the second exponent digit) to signify radian mode.”

Sample display:

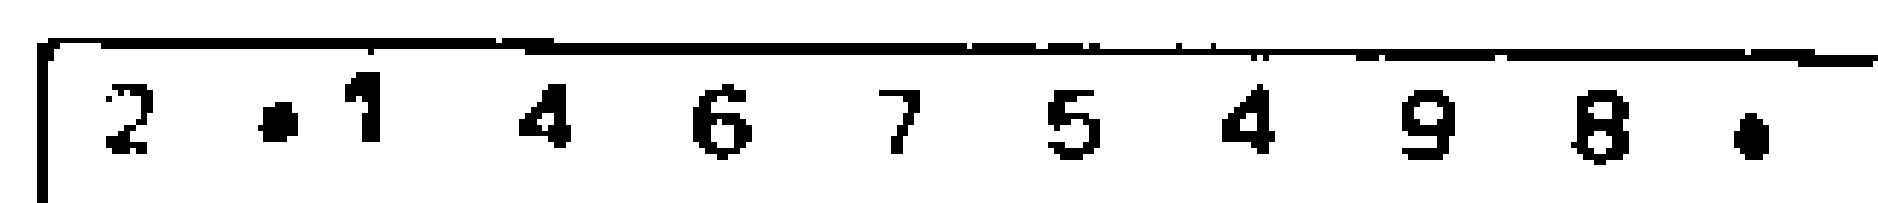

in radian
mode

Error Display

If an improper operation is attempted, the word ERROR will appear on your display. To clear the ERROR display, press **C/CE**.

3. Numerical Entry

Enter in a positive number by pressing the digit keys in order, from left to right. When not entered, the decimal point is assumed to be to the right of the least significant digit, which is the last number entered.

To enter negative numbers, simply enter as a positive and then depress **+/-**.

To enter exponents, enter the mantissa (maximum 10 digits) and then depress **EE** and enter in the exponent number (maximum 2 digits). To enter in a negative exponent, depress **+/-** after entering in the exponent number. To modify the mantissa, when the calculator is in an exponent mode, depress **F MANT**. This puts

the calculator in mantissa mode. The exponent is cleared when the calculator is put in mantissa mode. Therefore, after modifying the mantissa, depress **EE** and re-enter the exponent.

4. Upper Function Control Key and Inverse Keys **F** **(inv)**

The **F** key is depressed when an upper case function is required.

The **(inv)** key is required for obtaining the following inverse functions:
 \sin^{-1} , \cos^{-1} , \tan^{-1} , \sinh^{-1} , \cosh^{-1} ,
 \tanh^{-1} , and the inverses of the unit conversions.

To obtain the inverse function, say \sin^{-1} , simply enter the number followed by **(inv)**, **Sin**.

NOTE: When requiring the upper case inverse functions (such as the Hyperbolic Functions), the order of entry of the **F** and **(inv)** keys is not important.

If the **F** key is entered accidentally, depress it once more to remove it from that mode.

5. Clearing

- To clear an erroneous entry while keeping prior numerical entries intact, depress **C/CE** once.

EXAMPLE: $4 \div 2$ **C/CE** 4 **=** 1

Pressing **C/CE** once clears the display.

- To clear a calculation and allow for the entering of another calculation, depress **C/CE** twice successively.
- To clear the memory registers, as well as the display, depress **F CA**.
- To clear the calculation as well as the memory registers, switch off the power and switch it on again.

6. Simple Arithmetic

Four Functions **+** **-** **X** **÷**

To perform simple addition, subtraction, multiplication or division, simply enter as the problem appears: Example $x + y + z$

KEY ENTRY	DISPLAY	EXPLANATION
x	x	
[+]	x	for simple addition*
y	y	
[+]	y	
z	z	
[=]	x + y + z	

* For simple subtraction, multiplication or division, simply press the required key (i.e., [-], [x], or [/]).

Remark: The [=] key presents the final answer. There is no need to enter the [=] key after the first operation since the result is displayed after the function key is depressed.

7. Chained Calculations

Chained calculations involving several operations such as the calculation of the sum of products or the product of sums can be carried out by using parentheses, refer to next page. Simple chaining can be carried out as follows:

Example: $\frac{x \times y}{z} \div w$

KEY ENTRY DISPLAY

x	x
[x]	x
y	y

KEY ENTRY	DISPLAY
[=]	x × y
z	z
[/]	$\frac{x \times y}{z}$
w	w
[=]	$\frac{x \times y \div w}{z}$

Note: Chaining can be carried out with most functions although it is not available for certain advanced functions. See the table in the section on parentheses for the limitations on chained calculations.

8. Parentheses

Three levels of parentheses are provided on your calculator. Parentheses allow for straight-forward entry of more complex algebraic expressions such as sum of products.

EXAMPLE: Evaluate: $\frac{(5 \times 2) + (7 \times 3)}{(4 \times 8) + (9 \times 9)}$

KEY ENTRY DISPLAY

(((0
5	5
[x]	5
2	2
)))	10
[+]	10

KEY ENTRY DISPLAY

<input type="button" value="((("/>	10
7	7
<input type="button" value="x"/>	7
3	3
<input type="button" value=")))"/>	21
<input type="button" value="÷"/>	31
<input type="button" value="((("/>	31
<input type="button" value="((("/>	31
4	4
<input type="button" value="x"/>	4
8	8
<input type="button" value=")))"/>	32
<input type="button" value="+"/>	32
<input type="button" value="((("/>	32
9	9
<input type="button" value="x"/>	9
9	9
<input type="button" value=")))"/>	81
<input type="button" value=")))"/>	113
<input type="button" value="="/>	274336283

Trigonometric, logarithmic and exponential functions may be used within parentheses.

EXAMPLE: Evaluate

$$\frac{e^{(\sin 50 + \cos 23)} \times \ln 8}{2}$$

KEY ENTRY DISPLAY

<input type="button" value="((("/>	0
50 <input type="button" value="sin"/>	0.766044443
<input type="button" value="+"/>	0.766044443
23 <input type="button" value="cos"/>	.920504853
<input type="button" value=")))"/>	1.686549297
F <input type="button" value="e^x"/>	5.400811913
<input type="button" value="x"/>	5.400811913
8 <input type="button" value="ln"/>	2.079441542
<input type="button" value="÷"/>	11.23067265
2	2
<input type="button" value="="/>	5.615336326

The contents of user memories may also be recalled within parentheses.

Parentheses and Chaining

The three levels of parentheses may not be used when certain advanced functions are being computed. Similarly it is not possible to perform chained calculators with some functions. The table below provides the list of functions in which parentheses or chaining may not be available to the user.

Function	Use of parentheses	Chained Calculation
Rectangular/Polar Conversion	not allowed	not allowed
Natural log of gamma	allowed	not allowed
Permutations & Combinations	not allowed	allowed
Poisson density function	not allowed	allowed
Binomial density function	not allowed	allowed
Gaussian probability function	not allowed	allowed
Linear Regression	not allowed	not allowed
Mean & Standard Deviation	allowed	allowed
Numerical Integration	not allowed	not allowed
Complex Number Arithmetic	not allowed	not allowed
Also, Memory Registers 7,8 & 9 cannot be used when the user is using the three levels of parentheses. The calculator provides great flexibility in that if only one level of parentheses is needed then memories 1 - 8 are available, when two levels are required then memories 1 - 7 are available, and with all these levels of parentheses in use then memories 1 - 6 are available.		

9. Single Variable Functions

Finding square of numbers x^2

To find the square of a number, enter the number, then depress x^2 .

Finding square root of numbers \sqrt{x}

To obtain the square root of a number, enter the number, then depress \sqrt{x} .

Note: Valid for $x \geq 0$

Finding reciprocal of numbers $1/x$

The reciprocal of a number can be obtained by entering in the number and then depressing the key $1/x$.

Note: Not valid for $x = 0$

Finding natural logarithm of numbers \ln

To find the natural logarithm of a number, enter the number, then depress \ln .

Note: $x > 0$.

Finding e to the power x e^x

To obtain e to the power x, enter the number x, then key in e^x .

Finding common logarithm of numbers \log

The common logarithm of a number can be obtained by entering in the number and then depressing \log .

Note: $x > 0$.

Finding common antilog of numbers 10^x

To calculate the common antilog of a number, enter the number, then key in 10^x .

Finding trigonometric functions $\boxed{\text{Sin}}$, $\boxed{\text{Cos}}$.

$\boxed{\tan}$ $\boxed{\text{inv}}$

To find the sine of a number in degrees enter the number and then depress $\boxed{\text{Sin}}$. The cosine and tangent can be obtained similarly. If you want to calculate the Sine of a number in radians, set the calculator in the radian mode by pressing $\boxed{\text{F}}$ $\boxed{\text{d}\rightarrow\text{r}}$, and then enter in the number followed by $\boxed{\text{Sin}}$.

Cosine and tangent can be found similarly.

To find the inverse sin of a number, \sin^{-1} enter the number then depress $\boxed{\text{inv}}$ $\boxed{\text{sin}}$. The inverse of the cosine and tangent can be obtained similarly.

- Note: (1) inverse sine and cosine $\rightarrow |x| \leq 1$
 (2) also $\tan 90^\circ$ or $\tan \pi/2$ is invalid

Finding factorials $\boxed{n!}$

To obtain the factorial of an integer on display, press $\boxed{n!}$

Note: $n!$ is obtained if $n \leq 69$. For $n > 69$, use $\ln\Gamma(x)$ (refer to example).

10. Double functions

Finding y to the power x $\boxed{y^x}$

To raise a positive number to any power, enter as follows:

KEY ENTRY DISPLAY

y

y

$\boxed{y^x}$

y

x

x

$=$

y^x

Note: x can be an integer or a decimal, negative or positive.

Finding y to the root x $\boxed{F} \boxed{x\sqrt{y}}$

To obtain the x root, of any positive number y , enter as follows:

KEY ENTRY DISPLAY

y

\boxed{F}

$x\sqrt{y}$

x

$=$

$x\sqrt{y}$

Note: x can be negative or positive, an integer or a decimal. However, y may only be positive.

Using the Exchange Register Key $\boxed{x\leftrightarrow y}$
 The exchange key, $\boxed{x\leftrightarrow y}$ reverses the order of the operands. For instance, $x \div y$ will become $y \div x$. The exchange key can be used as follows:

KEY ENTRY DISPLAY

\boxed{x}

x

$\boxed{\div}$

x

\boxed{y}

y

$\boxed{x\leftrightarrow y}$

x

$=$

$y \div x$

Note: (1) The exchange register key may be used for the following operations: division, subtraction, power and root.

(2) Note also that the exchange key is used for entering and obtaining calculations for the following functions:

a. $\boxed{\int}$ Numerical integration

b. Complex arithmetic

c. $\boxed{\rightarrow P}$ Rectangular to polar conversion

d. $\boxed{\rightarrow R}$ Polar to rectangular conversion

e. $\boxed{\Delta\%}$ Percent difference

11. Degree/Radian Conversions & Modes

For either a degree/radian conversion or a change of degree/radian mode, press:

$\frac{d\leftarrow r}{r \leftarrow d}$

Pressing the above will both do the conversion and reset the mode. In other words, if the calculation is in degree mode and $F \frac{d\leftarrow r}{r \leftarrow d}$ is pressed, a degree to radian conversion is done and the calculator is put in radian mode. Likewise, if the calculator is in radian mode and $F \frac{d\leftarrow r}{r \leftarrow d}$ is pressed, a radian to degree conversion is done and the calculator is put in degree mode.

Rules for determining the calculator's mode are

- 1) When turned on, the calculator is initially in degree mode.
- 2) If there is a decimal point in the exponent field of the display, the calculator is in radian mode. If not, the calculator is in degree mode.

12. Conversions

(a) Rectangular/Polar Coordinates $\boxed{\rightarrow P} \rightarrow R$

(b) Degree to Radian Conversion $d \leftrightarrow r$

(c) Unit Conversions

The unit conversions available on the calculator are as follows:

		Conversion factor		
		Unit 1 to Unit 2	Unit 2 to Unit 1	
Length				
(mi) km		miles to kilometers	1.609344	0.621371192
(in) cm		inches to centimeters	2.54	0.393700787
MASS				
(lb) kg		pounds to kilograms	0.45359237	2.204622622
VOLUME				
(gal) L		gallons (IMP) to litres	4.546279553 0.219960076	
(fl oz) L		Fluid ounces (US) to litres	0.0295735296 33.81402266	
ENERGY				
(BTU) J		BTU to joules	1055.055853 9.478171203 $\times 10^{-4}$	
TEMPERATURE				
(°F) °C		degrees fahrenheit to degrees centigrade	$(^{\circ}\text{F}-32) \div 1.8$ $(^{\circ}\text{C} \times \frac{5}{9}) + 32$	

Length	Conversion Factor		
	Unit 1 to Unit 2	Unit 2 to Unit 1	
(ft) m	feet to meters	0.3048	3.28839895

4. Miscellaneous Conversions

(d) gra degree to grads

(d) dms degree to degrees (hours)-minutes-seconds.

To convert the display in UNIT 1 to UNIT 2 enter $\text{F } (1) 2$.

To convert the display in UNIT 2 to UNIT 1 enter $\text{F } [\text{INV}] (1) 2$.

3. User Memories

There are a maximum of nine memories available to the user. The nine memories will be referred to as registers from 1 to 9. All 9 memories may not be available to the user when certain advanced functions are being evaluated. Many of the problems presented provide excellent use of the memory registers. Refer to section 13 f, for limitations in the use of the memories.

a. Storing the Display in User Memory STO_n

For storing a number on display in a memory, simply depress: STO_n followed by an arbitrary number from 1 to 9 (these are the 9 memory registers available to the user).

For example to store 234 into register 2, simply enter 234, then depress $\text{STO}_n 2$.

b. Recalling the Quantity Stored in User Memory RM_n

For recalling a value stored in a memory register, simply depress RM_n followed by the memory register (number 1 to 9) in which the value is stored.

For example To recall the value stored in register 2, simply depress $\text{RM}_n 2$; value obtained on the display is 234.

c. Exchange User Memory and Display XCH_n

A very important operation available in the calculator is the exchange memory key XCH_n . The effect of XCH_n is to combine the effects of storing a new value and recalling the value stored earlier in one single step. To show how the XCH_n key is used, an example is presented below:

KEY ENTRY DISPLAY EXPLANATION

5 $\text{STO}_n 1$	5	5 in register 1
150 \div	150	
25	25	
$+$	6	
$\text{F } \text{XCH}_n 1$	5	6 in register (new number)
$=$	11	6 + 5
$\text{RM}_n 1$	6	

d. Four Function User Memories and Display $+Mn n, XMn$

Other important operations available in the calculator are simple arithmetic operations that can be carried out directly to the memory without the need to recall the value. This means that a new value a can be added, subtracted, multiplied or divided directly to a value present in any memory register. A new modified value will then occupy the memory register.

(1) To ADD a to the quantity present in memory register 1, enter a , press $+Mn 1$

(2) To SUBTRACT a from the quantity present in memory register 1, enter a , press $+/- +Mn 1$

(3) To MULTIPLY the quantity present in memory register 1 by the value a, enter a, press **[XMn]** 1

(4) To DIVIDE the quantity present in memory register 1 by the value a, enter a, press **[1/x]** **[XMn]** 1

Note: The value a can be added/subtracted to/from a quantity present in any memory register. Similarly for multiplying/dividing the quantity present in any memory register by the value a.

To illustrate this, evaluate

$$P_3^5 = 3! \cdot C_3^5$$

KEY ENTRY	DISPLAY	EXPLANATION
5 [α]	5	
3 [β] [F] C_m^n	9.99999999	
[STO] n 1	9.999...	Store in memory register 1
3 [F] C_m^n	9.999... C_3^5	
3 [$n!$]	6	
[XMn] 1	6	
[RMn] 1	60 6×10	

e. Clearing the User Memories **[CA]**

To clear all the user memory registers, depress **[F]** **[CA]**

If you want to clear only the value in one register, depress: 0 **[STO]** n (n referring to the memory register that is to be cleared.)


1. User Memory Register Limitations

All user memory registers are not available under certain conditions. The table below provides the list of the memories not available when using certain functions.

Function	Memory Registers Not available
Polar/ Rectangular Conversions	9
Natural log of gamma	9
Numerical Integration	8, 9
Complex Number arithmetic	8, 9
Permutations & Combinations	6, 7, 8, 9
Poisson density function	8, 9
Binomial density function	6, 7, 8, 9
Gaussian probability function	8, 9
Linear Regression	1-6, 8, 9
Mean & Standard deviation	4-6

III. OPERATING INSTRUCTIONS -- SPECIAL FUNCTIONS

1. Polar/Rectangular Conversions

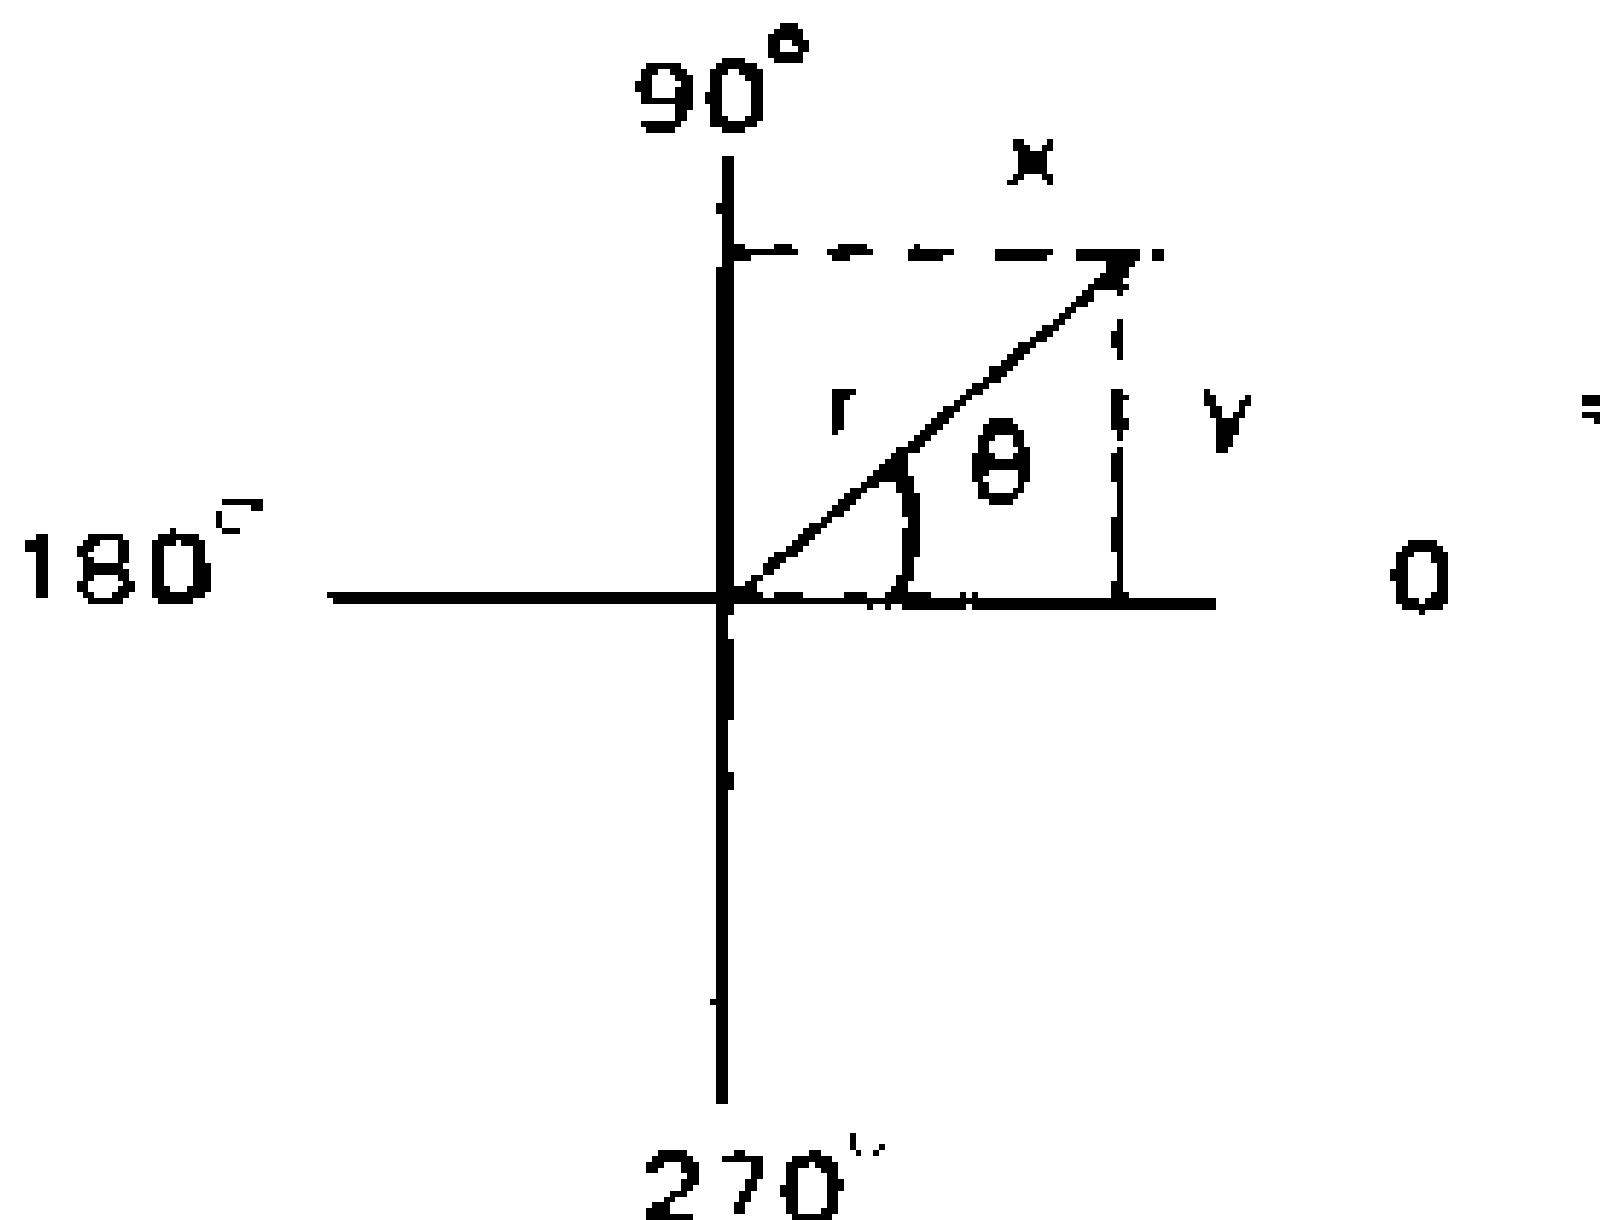

The formulas for converting rectangular coordinates to polar coordinates are:

$$r = \sqrt{x^2 + y^2}$$

$$\theta = \tan^{-1} \frac{y}{x}$$

For converting polar to rectangular coordinates, the formulae are:

$$x = r \cos \theta \quad y = r \sin \theta$$

a. Rectangular to Polar $\rightarrow P$

To convert (x,y) to (r,θ) , the following key sequence is used:

KEY ENTRY DISPLAY

x x

$\boxed{x \leftarrow y}$ 0

y y

$\boxed{\rightarrow P}$ r

$\boxed{x \leftarrow y}$ θ

b. Polar to Rectangular $\rightarrow R$

To convert (r,θ) to (x,y) the following key sequence can be used:

KEY ENTRY DISPLAY

r r

$\boxed{x \leftarrow y}$ 0

θ θ

$\rightarrow R$ x

$\boxed{x \leftarrow y}$ y

Note: (1) User memory register 9 is not available during rectangular/polar conversion.

(2) Chaining and Parenthesis are not available when using these conversions

2. Hour-Minutes-Second Function (Or Degrees-Minute-Second Function)

a. Hour-Minute-Second Entry.

To enter numbers in the hour-minute-second (or degree-minute-second) format, enter the hours or degrees (integer up to 9999) and then depress \boxed{HMS} . Minutes can be entered next followed by depressing \boxed{HMS} , then enter the seconds (Both the minutes and the seconds can be entered up to 99, in integer form)

Supposing we want to enter 30 degrees, 45 minutes and 10 seconds) enter as follows:

HMS

30

45

30.45

HMS

30.45

10

30.45.10

30 degrees.45
minutes . 10 seconds

If the minutes or seconds entered are greater than 60, depressing an arithmetic operator or the equals key will normalize the answer.

b. Hour-Minute-Second Arithmetic

Arithmetic operations such as addition subtraction, multiplication or division can be carried out in the H-M-S format.

Arithmetic operations where the first factor is expressed in the HMS mode and the second in decimal, will give results in the HMS mode. Addition or subtraction with both factors in the HMS mode will not change the mode.

However, if multiplication or division is carried out the result will appear in decimal form.

c. HMS/Decimal Conversion

To convert the decimal form into the HMS format (i.e. hours/degrees-minutes-seconds), depress **F** [**d**]dms.

To obtain the decimal form when the display is in the HMS mode, depress **(inv)** **F** [**d**]dms.

3. Natural Logarithm of Gamma Function

The Gamma Function is given by the formula:

$$\Gamma(x) = \int_0^{\infty} e^{-t} t^{x-1} dt$$

The natural log of gamma as opposed to gamma is given in order to extend the range of x values for which gamma can be evaluated. To obtain the lnΓ(x), enter the following:

KEY ENTRY	DISPLAY
x	x
F lnΓ(x)	"lnΓ(x)"

- Note:
1. Memory register 9 is not available and the use of parentheses are not allowed when using this function.
 2. Applications of the gamma function are found in mathematical physics and engineering.
 3. The natural logarithm of gamma allows you to calculate factorials > 69.

4. The Hyperbolic Functions

The hyperbolic functions are defined as follows:

$$\sinh x = \frac{e^x - e^{-x}}{2}$$

$$\cosh x = \frac{e^x + e^{-x}}{2}$$

$$\tanh x = \frac{e^x - e^{-x}}{e^x + e^{-x}}$$

To obtain the hyperbolic sine of x, enter x and then depress **F** sinh. The hyperbolic cosine and hyperbolic tangent can be obtained similarly.

To calculate the inverse of the hyperbolic functions, enter the number followed by **(inv)** **F** sinh. The inverse of tanh and cosh can be obtained similarly.

Note: The inverse hyperbolic functions are defined as follows:

$$\sinh^{-1} x = \ln(x + \sqrt{x^2 + 1})$$

$$\cosh^{-1} x = \ln(x + \sqrt{x^2 - 1})$$

$$\tanh^{-1} x = \frac{1}{2} \ln\left(\frac{1+x}{1-x}\right)$$

5. Numerical Integration


The numerical integration in this calculator uses the trapezoidal rule, which is given by:

$$\int_{x_0}^{x_n} f(x)dx \approx h \left[y_0 + 2y_1 + \dots + 2y_{n-1} + y_n \right]$$

Its truncation error is approximately -

$$\frac{(x_n - x_0) h^2 y''(\xi)}{12}$$

To numerically integrate between two end points, (x_1, y_1) and (x_4, y_4) having points (x_2, y_2) , (x_3, y_3) in between, enter as follows:

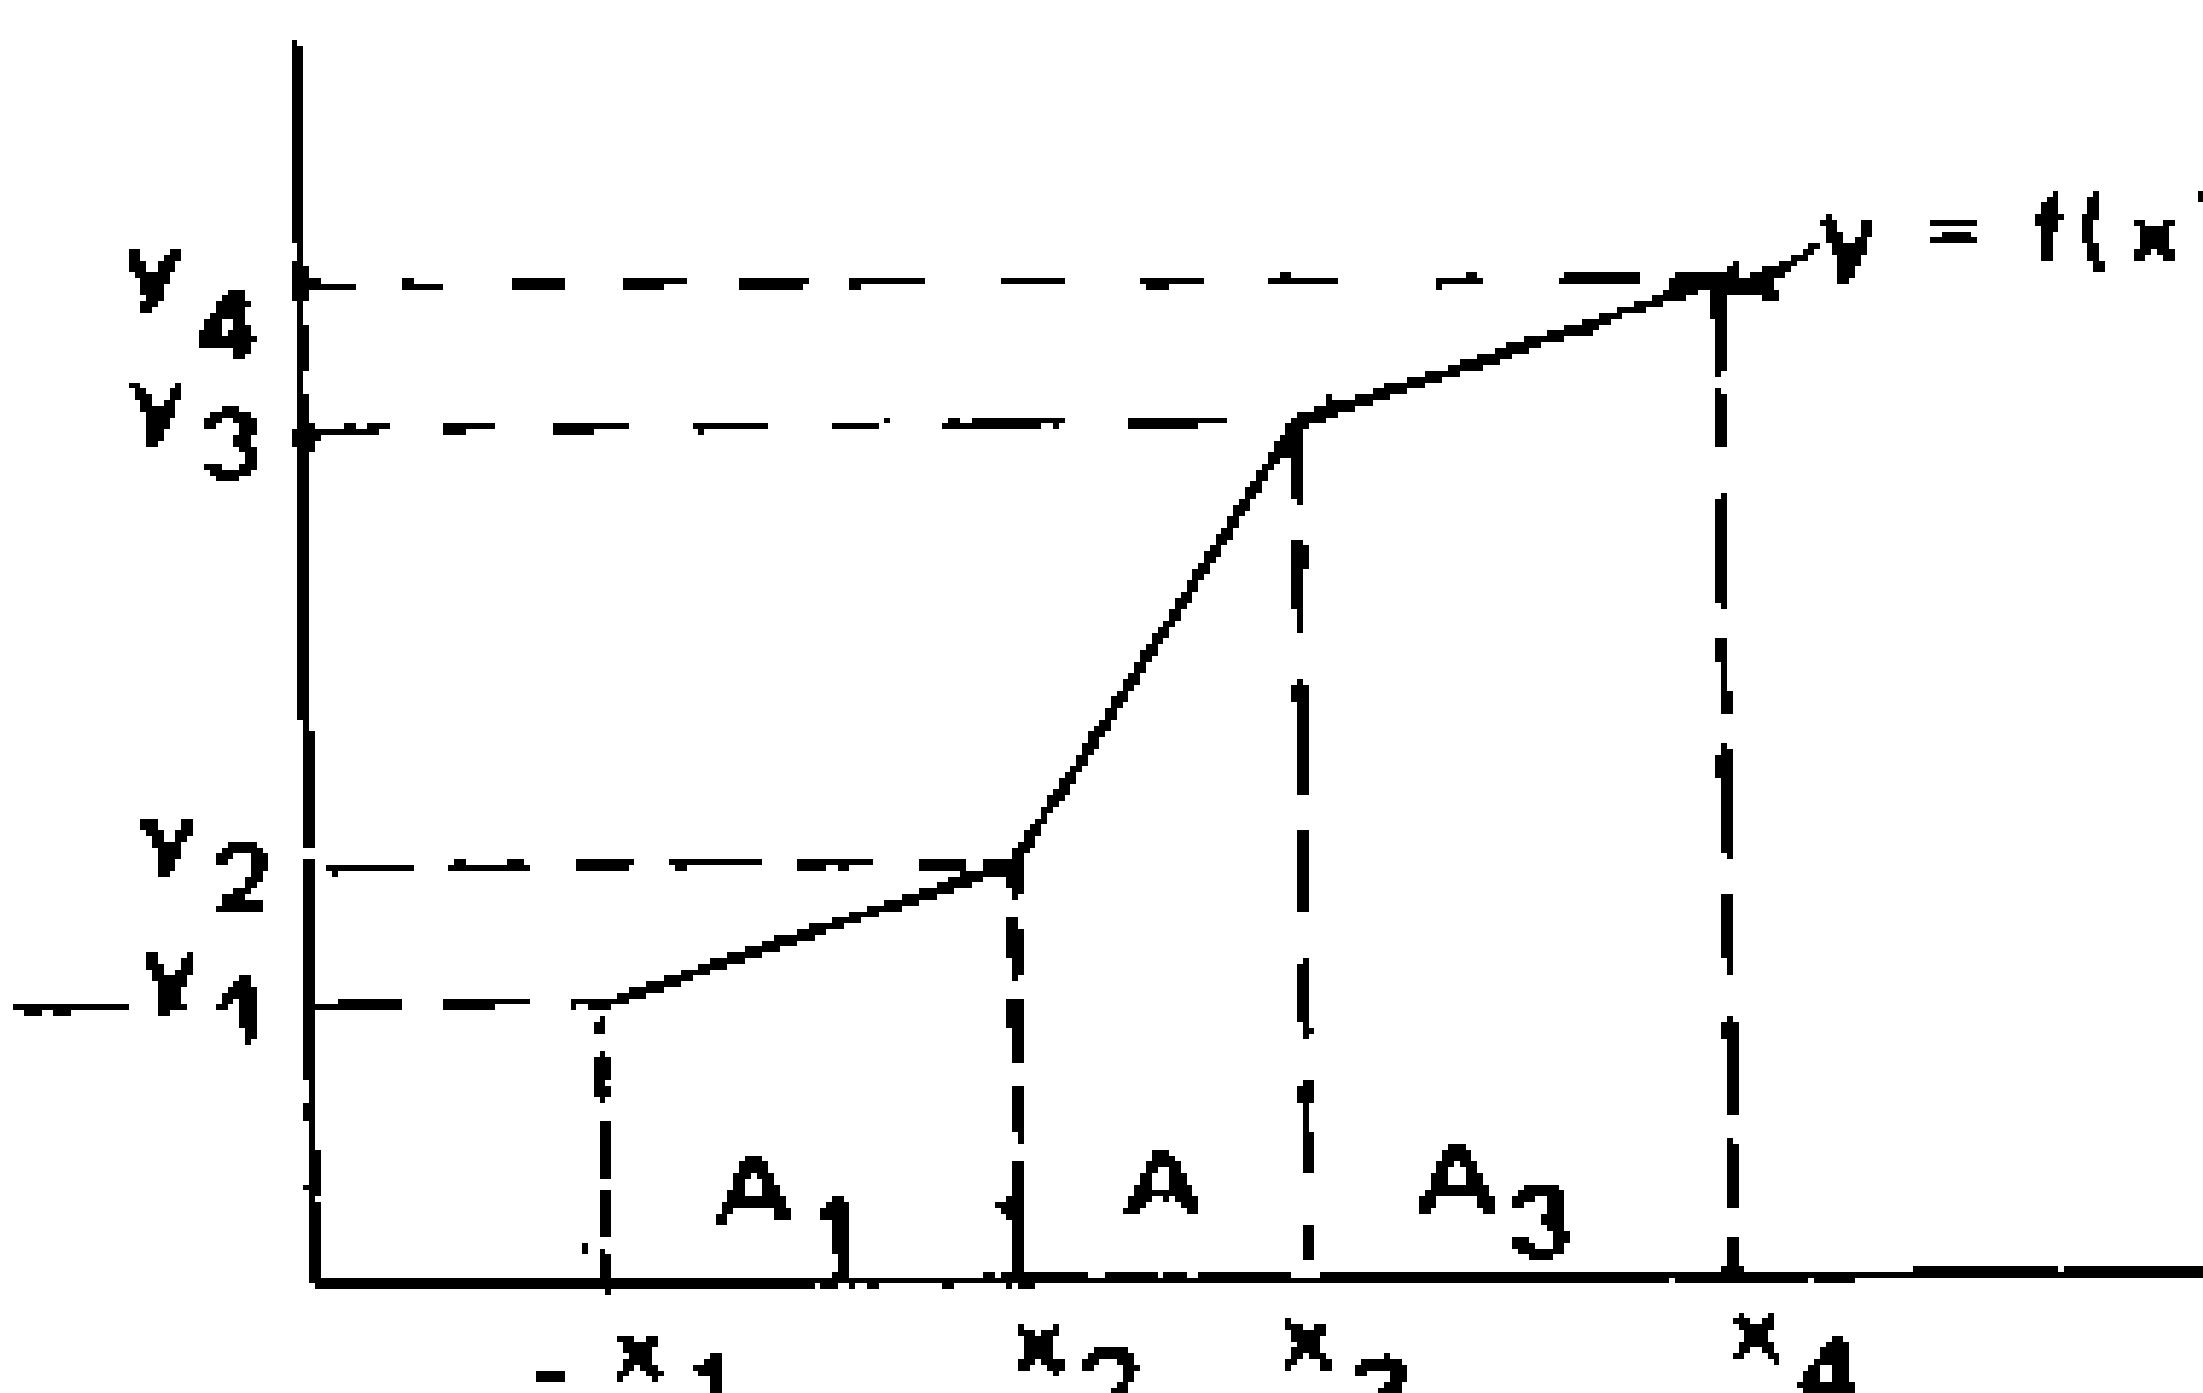

$$\int_{x_1}^{x_4} f(x)dx = A_1 + A_2 + A_3$$

KEY ENTRY	DISPLAY	EXPLANATION
<input type="checkbox"/> F	CA	O
<input type="checkbox"/>	x ₁	x ₁
<input type="checkbox"/> x↔y	O	
	y ₁	y ₁
<input type="checkbox"/> ∫	O	Simple arithmetic may be used to evaluate y = f(x)
	x ₂	x ₂
<input type="checkbox"/> x↔y		
	y ₂	y ₂
<input type="checkbox"/> ∫	{x ₂ x ₁	A ₁
	x ₃	x ₃
<input type="checkbox"/> x↔y		
	y ₃	y ₃
<input type="checkbox"/> ∫	{x ₃ x ₁	A ₁ + A ₂
	x ₄	x ₄
<input type="checkbox"/> x↔y		
	y ₄	y ₄
<input type="checkbox"/> ∫	{x ₄ x ₁	A ₁ + A ₂ + A ₃

- Note: 1. Memory registers 8 & 9 are not available to the user.
2. Chaining and parentheses are not available.
3. Function x is defined by the order in which coordinates are entered.
4. Both the calculator and memory registers must be cleared prior to initial data entries.

6. Complex Arithmetic

Suppose $(x_1 + y_1i)$ and $(x_2 + y_2i)$ are complex numbers. To perform complex arithmetic, enter the following key sequence,

KEY ENTRY	DISPLAY	EXPLANATION
x_1	x_1	
$\boxed{x \leftrightarrow y}$	0	
y_1	y_1	
$F \boxed{j} +$	y_1	or any complex operation ($F \boxed{j} \cdot$, $F \boxed{j} x$, $F \boxed{j} -$)
x_2	x_2	
$\boxed{x \leftrightarrow y}$	0	
y_2	y_2	
For the results, enter the following:		
=	x_a	real part of result A
$\boxed{x \leftrightarrow y}$	y_a	imaginary part of result A

Results may be converted to polar coordinate form, using the $\boxed{\rightarrow P}$ $\boxed{\rightarrow R}$ conversion keys.

Note: (1) Parentheses are not available when performing complex arithmetic.

(2) Chained calculations may not be performed.

(3) Memories 8 and 9 are not available when performing complex arithmetic.

Percent Key %

The percent key displays a number entered as a percentage in decimal form. The percent key can be used with any of the four function keys (+, -, ÷, ×) to solve problems of mark up/mark down, tax add-on and chain discounts. Refer to the examples in the appendix

The following example shows how the % key may be used.

Find 8% of 210.

KEY ENTRY	DISPLAY
8	8
$F \boxed{\%}$	8.02
$\boxed{\times}$	8.02
210	210
$\boxed{=}$	16.8

Percent Difference. $\frac{\Delta}{A} \%$

The formula used for evaluating the percent difference is:

$$A \Delta \% B = \frac{B-A}{A} \times 100\%$$


The percent difference key calculates the percent difference between a base A and any number B. The result is given in (%) of the base.

To find the percent difference of A by a number B, enter as follows:

KEY ENTRY **DISPLAY**

A


A

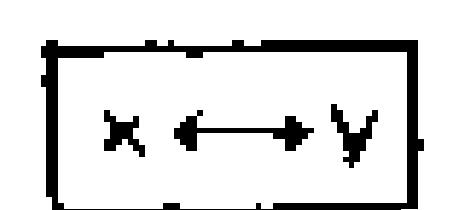

O

B

B

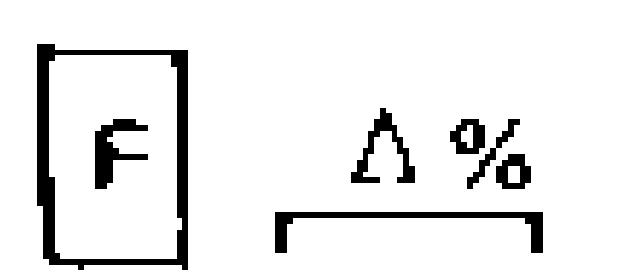

$$\frac{B-A}{A} \%$$

Refer to the appendix for examples of $\Delta \%$ calculations.

IV. OPERATING INSTRUCTIONS-- STATISTICAL FUNCTIONS

1. Permutation and Combination

C_m^n

P_m^n

These are evaluated using:

$$P_m^n = \frac{n!}{(n-m)!}$$

$$C_m^n = \frac{n!}{m!(n-m)!}$$

Where n, m are integers and $0 < m < n$.

To find P_m^n , enter n and m as follows:

KEY ENTRY **DISPLAY**

n

n

m

m

β

m

P_m^n

P_m^n

To find C_m^n , enter n and m as follows:

KEY ENTRY **DISPLAY**

n

n

α

n

m

m

β

m

F C_m^n

C_m^n

NOTE 1 Chaining and parentheses are not available for either P_m^n or C_m^n .

2. Poisson Density Function \overline{POISS}

The Poisson Probability Mass Function is evaluated using:

$$POISS(k) = \frac{\lambda^k e^{-\lambda}}{k!} \quad \text{Where } \lambda > 0 \text{ and } k = 0, 1, 2, \dots$$

To obtain the Poisson Probability Mass Function, enter as follows:

KEY ENTRY DISPLAY

k	k
<input type="button" value="a"/>	k
λ	λ
<input type="button" value="F POISS"/>	POISS (K)

Note: 1. Memory registers 8 & 9 are not available when evaluating the Poisson Density function.

2. Parentheses are not available when using this function but chaining is allowed.

3. Binomial Density Function BINOM

The Binomial Density Function is evaluated using:

$$\text{BIN}(k) = \frac{n!}{k!} P^k Q^{n-k}$$

Where n is a positive integer and $0 < P < 1$ and $k = 0, 1, 2, \dots, n$
 $Q = 1 - P$

To evaluate the Binomial Density Function enter as follows:

KEY ENTRY DISPLAY

n	n
<input type="button" value="a"/>	n
k	k
<input type="button" value="β"/>	k
<input type="button" value="F BINOM"/>	BIN (K)

Note: 1. Memory registers 6,7,8,9 are not available when evaluating the Binomial Density function.

2. Parentheses are not available when using this function but chaining is allowed.


4. Gaussian Probability Distribution GAUSS

The Gaussian Probability Distribution function (Φ) is evaluated using:

$$\Phi(x) = \int_{-\infty}^x \frac{1}{\sqrt{2\pi}} e^{-y^2/2} dy$$

where $-\infty < x < \infty$

To evaluate $\Phi(x)$, enter x then depress

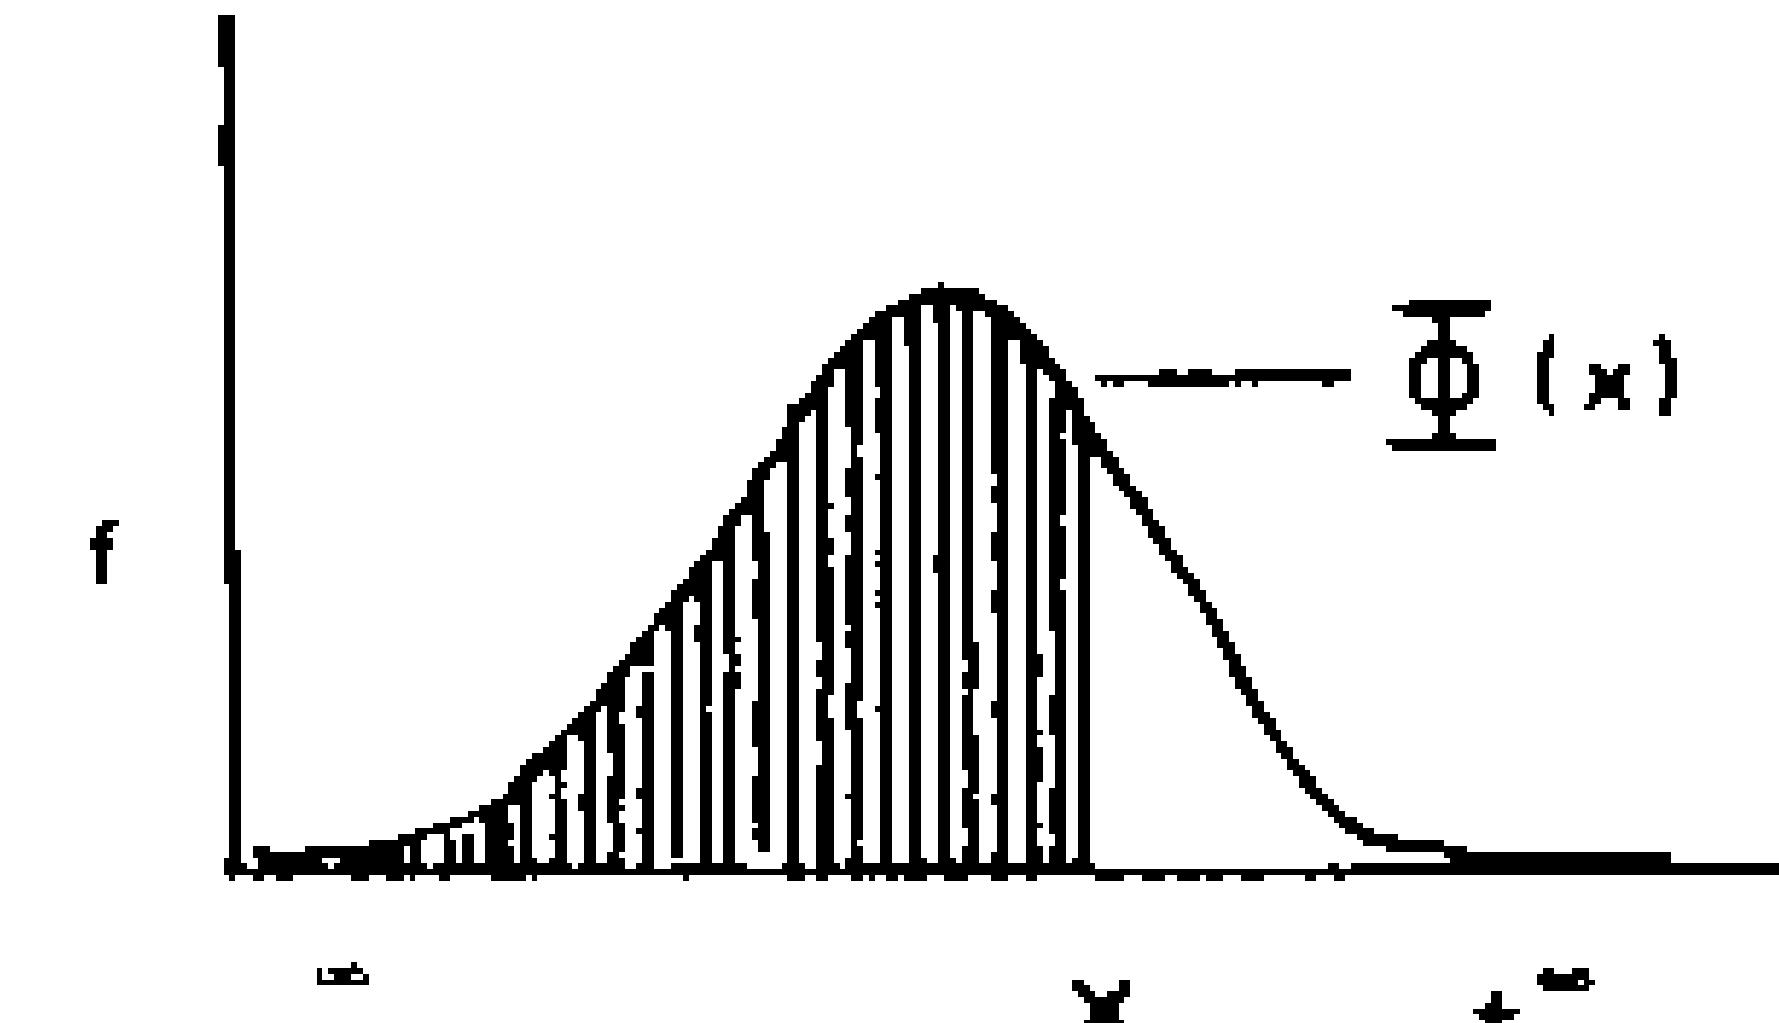

Gaussian Distribution curve

Note: 1) Memory registers 8 and 9 are not available when evaluating this function

2) Parentheses are not allowed but chaining can be used.

5. Linear Regression

Before entering data for this function clear all data registers by pressing

A series of points on a graph may be approximated to the straight line $y = mx + c$ where m is the slope and c the intercept. By

entering data points x_i, y_i , the calculator will compute m and c automatically using the following equations.

$$m = \frac{n \sum_{i=1}^n x_i y_i - \sum_{i=1}^n x_i \sum_{i=1}^n y_i}{n \sum_{i=1}^n x_i^2 - (\sum_{i=1}^n x_i)^2}$$

$$n = n \sum_{i=1}^n x_i^2 - (\sum_{i=1}^n x_i)^2$$

and

$$c = \frac{\sum_{i=1}^n y_i \sum_{i=1}^n x_i^2 - \sum_{i=1}^n x_i \sum_{i=1}^n x_i y_i}{n \sum_{i=1}^n x_i^2 - (\sum_{i=1}^n x_i)^2}$$

where n is the number of data points entered.

This calculator has the ability to preserve the data base during the calculation of m and c allowing the user to add or delete data points at will and recompute the parameters of the best fit straight line.

To enter data

KEY ENTRY DISPLAY

<input type="checkbox"/> CA	0	
x_1	x_1	1st x
<input type="checkbox"/> x_i	x_i	
y_1	y_1	1st y
<input type="checkbox"/> y_i	1	One data point entered
x_2	x_2	2nd x
<input type="checkbox"/> x_i	x_2	
y_2	y_2	2nd y

KEY ENTRY DISPLAY

<input type="checkbox"/> y_i	2	Two data points entered
x_n	x_n	n th y
<input type="checkbox"/> x_i	x_n	
y_n	y_n	n th y
<input type="checkbox"/> y_i	n	

To find the value \hat{y} corresponding to a value x enter x and press y and similarly to obtain x corresponding to a value y enter y and press x . The data base is preserved in memory registers 1 through 6 as follows.

MEMORY	1	2	3	4	5	6
QUANTITY	Σxy	Σy^2	Σy	Σx^2	Σx	n

DELETION OF POINTS

To delete a point x, y from the data base:

KEY DISPLAY

x	x
<input type="checkbox"/> x_i	x
y	y

y_i n — number of points left.

New points may be added as before.

- Note: 1) The number of points entered is unrestricted.
 2) The data must be entered in pairs, x value entered first.
 3) Only memory register 7 is available for independent use.
 4) Neither parentheses nor chaining are available when using the linear regression function

- 5) The values of the data base stored in memories 1 through 6 are available by pressing **R_M**_n followed by the required memory register address.

EXAMPLE

Suppose we have a set of points (x_i, y_i) with which we want to fit a straight line:

$y = a + \beta x$ the data is given below

x	3	4	6	8
y	5	7	9	13

- (a) the slope b (the best estimate of β).
- (b) the intercept, a (the best estimate of α).
- (c) fitted value of y for a corresponding x , where $\hat{y} = a + \beta x$ let $x = 9$
- (d) fitted value of x for a corresponding y , where $\hat{x} = \frac{y - a}{\beta}$ let $y = 15$

Then the data may be entered as follows.

KEY ENTRY DISPLAY

F	CA	0
		3
x_i	3	
5		5
y_i	1	
4		4
x_i	4	
7		7

KEY ENTRY DISPLAY

y_i	2
6	6
x_i	6
9	9
y_i	3
8	8
x_i	8
13	13
y_i	4
F	Slope
	1.525423729
F	intcp
	0.491525423
9	Ŷ
	14.22033898
15	X̂
	9.511111111

How to obtain the coefficient of correlation (r)

The coefficient of correlation is given by:

$$r = \frac{\sum x_i y_i - \frac{(\sum x_i)(\sum y_i)}{n}}{\sqrt{\left(\sum x_i^2 - \frac{(\sum x_i)^2}{n} \right) \left(\sum y_i^2 - \frac{(\sum y_i)^2}{n} \right)}}$$

The formula used for evaluating the coefficient of correlation is given by:

$$r = \frac{\text{slope} \times \text{standard deviation of } x}{\text{standard deviation of } y}$$

Using the example given in linear regression, the following key sequence may be used:

KEY ENTRY	DISPLAY	EXPLANATION	KEY ENTRY	DISPLAY	EXPLANATION
C/CE	0		f slope x	1.525423729	$\sum x_i y_i$
RM _n 3	34	$\sum y_i$	RM _n 1	201	$\sum x_i y_i$
x ²	1156	$(\sum y_i)^2$	[] +/-	306.6101695	
÷	1156		[] +	306.6101695	
4	4		RM _n 2	324	$\sum y_i^2$
[] +/-	-289		[]	17.38983051	
[] +	-289		STO _n 7	17.38983051	
RM _n 2	324		F intcpt	0.491525423	
÷	35		[] x	0.491525423	
3	3		RM _n 3	34	$\sum y_i$
[]	11.6666667	Sy	[] +/-	-16.71186441	
F √x	3.415650255	Sy	[] RM _n 7	17.38983051	
1/x	0.292770021		[]	0.677966102	RSS
[] x	0.292770021				
F S	2.217355783				
[] x	0.649175301				
F Slope	1.525423729				
[]	0.990267408				

How to obtain the Residual Sum of Squares (RSS)

The Residual Sum of Squares is evaluated using the following formula:

$$RSS = \sum y_i^2 - \text{intcpt} \times \sum y_i - \text{slope} \times \sum x_i y_i$$

To obtain the Residual Sum of Squares of the example enter as follows:

The standard error of estimate of y on x can be obtained by using the formula:

$$Sy_x = \sqrt{\frac{RSS}{n-2}}$$

6. Mean and Standard Deviation

Before entering data for mean and standard deviation, memory registers 4,5 and 6 have to be cleared by storing zero in each of the registers 4,5 and 6. Just in linear regression, your data base is preserved, and therefore depressing [X] or F S or F S' does not destroy the data base. The data base is preserved as follows:

MEMORY REGISTER	QUANTITY
6	n
5	$\sum_{i=1}^n x_i$
4	$\sum_{i=1}^n x_i^2$

To retrieve a quantity, press RM_n followed by the required memory register.

Values can be deleted as in linear regression. To delete a value, enter (inv) number X_n .

Supposing we are given a set of numbers 6.1, 5.8, 4.5, 5.5 and we want to evaluate

a. the Mean \bar{X}

$$\text{Where } \bar{X} = \frac{\sum_{i=1}^n x_i}{N}$$

b. standard deviation of the sample (unbiased),

$$\text{Where } S = \sqrt{\frac{\sum_{i=1}^n x_i^2 - \bar{X}^2 N}{N-1}}$$

c. standard deviation of the population (biased),

$$\text{Where } S' = \sqrt{\frac{\sum_{i=1}^n x_i^2 - \bar{X}^2 N}{N}}$$

d. standard error of sample,

$$\text{Where } S_x = \frac{S}{\sqrt{N}}$$

Then we can enter as follows

KEY ENTRY	DISPLAY	EXPLANATION
5.1	5.1	
X_n	5.1	
5.8	5.8	
X_n	5.8	
4.5	4.5	
X_n	4.5	
5.5	5.5	
X_n	5.5	
\bar{X}	5.225	
F S	0.56199051	standard deviation of sample
F S'	0.486698058	standard deviation of population
		and for the standard error of sample,
RM_6	4	N
F \sqrt{x}	2	\sqrt{N}
$1/x$	0.5	
x	0.5	
F S	0.56199051	$\frac{S}{\sqrt{N}}$
	0.28095255	S_x (standard error)

Remarks: (1) Clear memory registers 4,5 and 6 prior to entering data.

(2) Memory registers 4,5 and 6 are not available for user.

(3) The number of sample values is unrestricted.

(4) N is a positive integer, > 1 .

(5) Both chaining and parentheses are allowed.

7. General Curve Fitting

Use transformation for dependent variable y given by $W_{(k)} = \frac{y^k - 1}{k}$

where $0 \leq k \leq 1$

Since limit $W_{(k)} = \ln y$
 $k \rightarrow 0$

$k = 1$ gives a linear fit and $k \rightarrow 0$ gives an exponential curve fit, $K = 0.5$ gives a quadratic curve fit and so on. Thus the above transformation gives a wide range of general curve fittings ranging from the linear to the exponential case.

Suggested procedure to be followed for practical examples:

Do a linear regression without using a transformation. Find the Residual Sum of Squares (RSS). Pick a value of k between 0 and 1 and use the above transformation for the y values. Find the RSS. Choose the k which gives the smallest RSS. Usually it is sufficient to enter the data only three to four times to get a good value of k .

V. APPLICATIONS – EXAMPLES

Rectangular to Spherical Conversion

Convert (2,5,8) given in rectangular coordinates to spherical coordinates (r, θ, ϕ) .


Solution:

Enter as follows:

	KEY ENTRY	DISPLAY	EXPLANATION
	2	2	enter x
	<input type="button" value="x↔y"/>	0	
	5	5	enter y
	<input type="button" value="→P"/>	5.385164807	$r \sin \phi$
	<input type="button" value="x↔y"/>	68.19859051	get θ
	8	8	enter z
	<input type="button" value="x↔y"/>	5.385164807	$r \sin \phi$
	<input type="button" value="→P"/>	9.643650761	get r
	<input type="button" value="x↔y"/>	33.94629503	get ϕ

the coordinates are (9.64, 68.20, 33.9).

2. Vector Addition

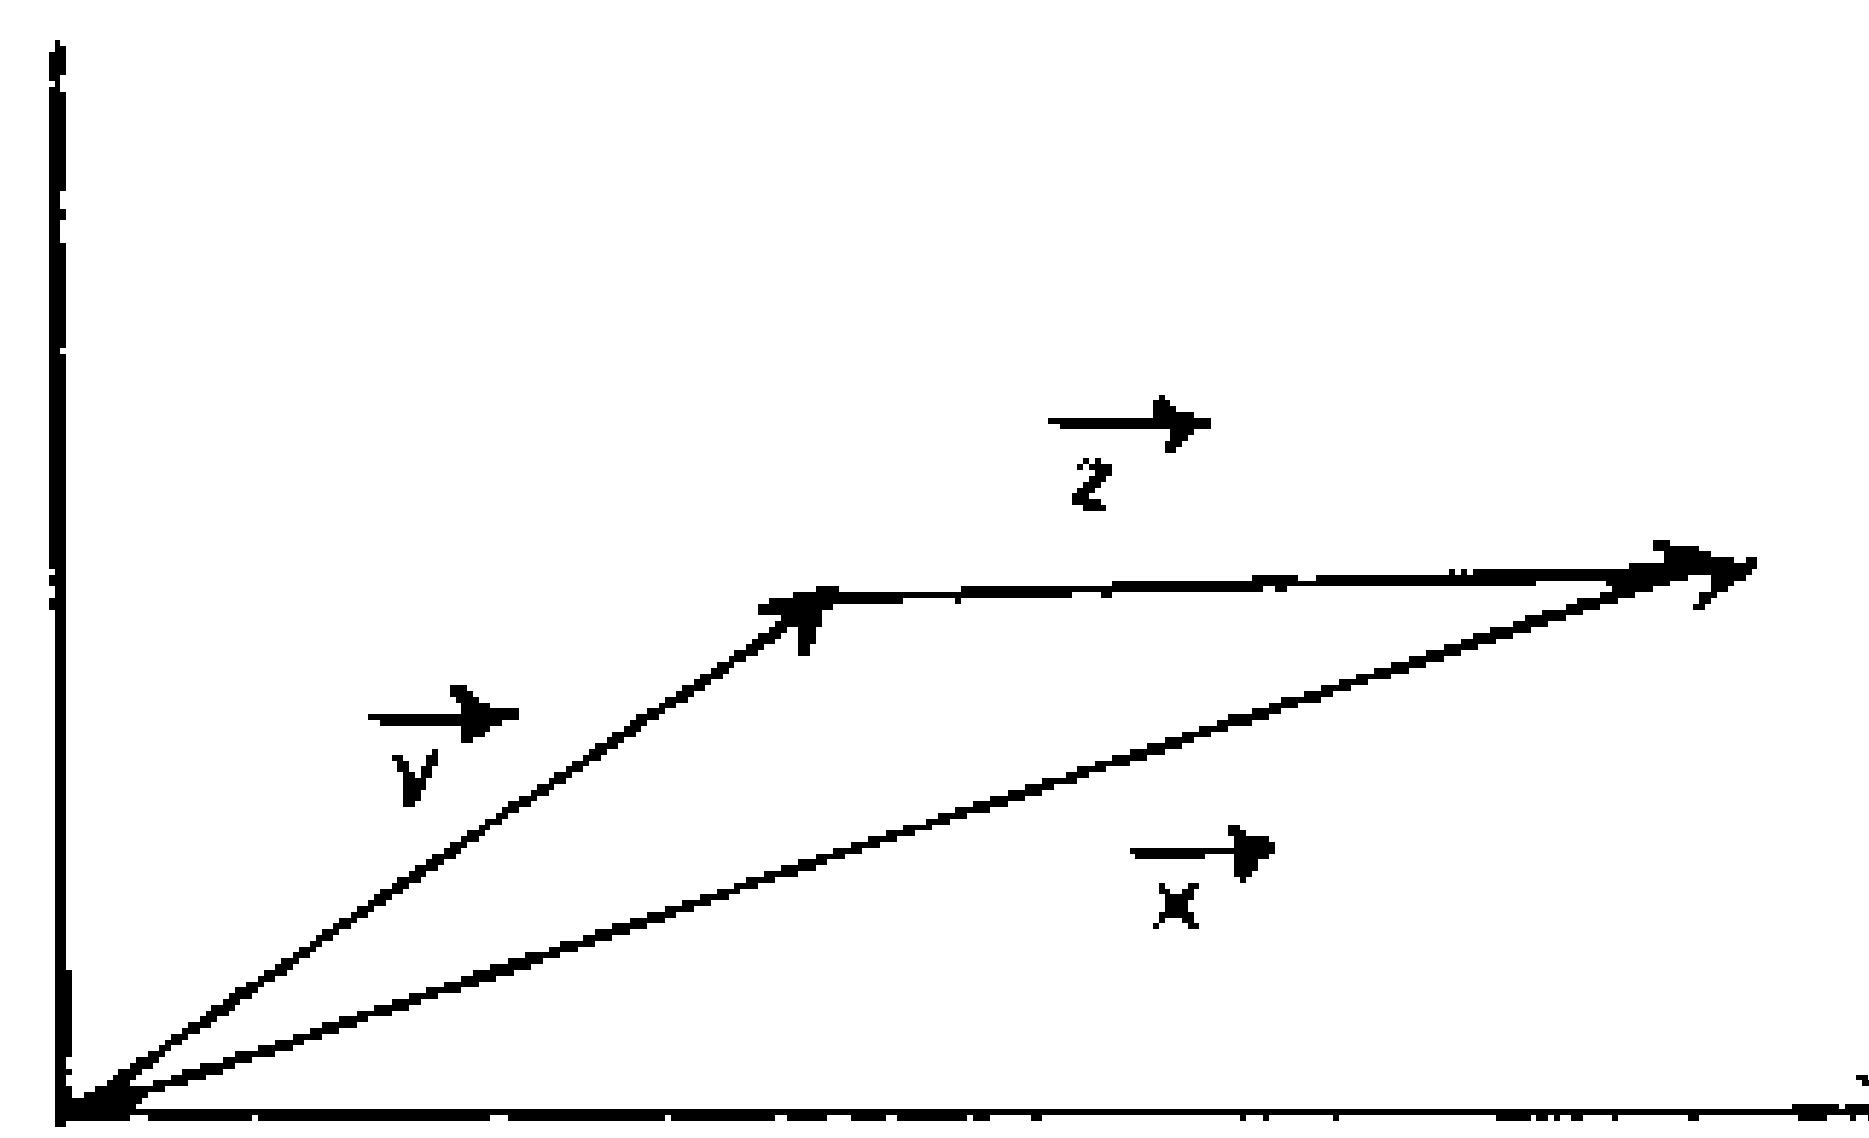

Add the two vectors $\vec{X} = (7, 27^\circ 35' 22'')$
and $(3, 42^\circ 37' 30'')$

Solution

The vectors in rectangular coordinates are given by

$$X_z = (X_x + X_y)$$

$$Y_z = (Y_x + Y_y)$$

and in polar coordinates by

$$\vec{X} = (R_x, \theta_x)$$

$$\vec{Y} = (R_y, \theta_y)$$

$$\vec{Z} = (R_z, \theta_z)$$

We have to find the resultant vector, \vec{Z} .

Enter as follows

KEY ENTRY	DISPLAY	EXPLANATION
7	7	enter R_x
$x \leftrightarrow y$	0	
27 hms		
35 hms 22	27-35-22	enter θ_x
$F \rightarrow R$	6.204022418	get X_x
STO_n 1	6.204022418	Store X_x in memory register
$x \leftrightarrow y$	3.241929339	get Y_x
STO_n 2	3.241929339	Store Y_x in register 2
3	3	enter R_y

KEY ENTRY DISPLAY EXPLANATION

$$x \leftrightarrow y$$
 6.204022418

$$42 \text{ hms}$$
 42-37-30 enter θ_y

$$[F] \rightarrow R$$
 2.207405023 get X_y

$$[+ M_n]$$
 1 2.207405023 add $X_y + X_x = X_z$ in register

$$x \leftrightarrow y$$
 2.031591265 get Y_y

$$+ M_n$$
 2 2.031591265

$$8.411427441$$
 recall X_z

$$RM_n$$
 1

$$x \leftrightarrow y$$
 2.207405023

$$RM_n$$
 2 5.273520603

$$[+ P]$$
 9.927846249 get R_z

$$x \leftrightarrow y$$
 32.08553912 get θ_z in decimal degrees

$$[F] (d) dms$$
 32-05-08 get θ_z in degrees-minutes-seconds

3. Hour-Minute-Second Arithmetic

Example:

A milkman from a dairy normally takes 2 hours and 35 minutes to go to Daly City and it takes 45 minutes and 50 seconds from there to Palo Alto. How long does it take the milkman to reach Palo Alto?

Solution:

Enter as follows:

KEY ENTRY	DISPLAY
2 [HMS]	2
35 [HMS]	2-25-
0	2 35.0
[+]	2.35.00
0 [HMS]	0-
45 [HMS]	0.45-
50	0.45.50
[=]	3.20.50

The trip took 3 hours and 20 minutes and 50 seconds to Palo Alto.

- b. Because of an accident on the highway, it took the milkman 4 hours, 10 minutes and 44 seconds. How late was the delivery?

Solution:

Enter as follows:

KEY ENTRY	DISPLAY
[+/-]	-3.20.50
[+]	-3.20.50
4 [HMS]	4-
10 [HMS]	4.10-
44	4.10.44
[=]	0.49.540

Therefore, the milkman was late by 49 minutes and 54 seconds.

4. Example: Hyperbolic Functions on Resonant Circuits

- a) Find the amplitude at resonance of a magnetic field if the terminations are dissipative. The attenuation factors are given by

$$A_0 = 0 \quad A_s = 1.77$$

Also $\alpha gSp = 1.17$. Let $K = 2.4$

- b) Find the efficiency of the transmission, i.e., P_s/P_0 .
- c) Find the decibel loss

Solution:

the amplitude is given by,

$$K_p = \frac{K}{\sinh(\alpha gSp + A_s + A_0)}.$$

Enter as follows:

KEY ENTRY	DISPLAY	EXPLANATION
1.77	1.77	A_s
[1]	1.77	
1.17	1.17	gSp
[=]	2.94	
[F sinh	9.431490292	
[1/X]	0.106027782	
[X]	0.106027782	
2.4	2.4	
[e]	0.254466677	

Therefore, the amplitude is 0.25 to 2 decimal places.

b) to find the efficiency of the transmission, i.e. P_s/P_o we use the relationship

$$\frac{P_s}{P_o} = \frac{\sinh 2 A_s}{\sinh 2(\alpha g S_p + A_s)}$$

Enter as follows:

KEY ENTRY	DISPLAY	EXPLANATION
1.77	1.77	
[+]	1.77	
1.17	1.17	
[x]	2.94	
2	2	
[=]	5.88	
[F] sinh	178.9032235	
[1/x]	5.58961421 -03	
[STO _n] 1	5.58961421 -03	
1.77	1.77	
[x]	1.77	
2	2	
[=]	3.54	
[F] sinh	17.21895293	
[XMn] 1	17.21895293	
[RM _n] 1	9.624730398 02	

The efficiency is 0.096;

c) We find the decibel loss by

$$\text{Loss (db)} = 10 \log_{10} \frac{P_o}{P_s}$$

Enter as follows:

KEY ENTRY	DISPLAY
[RM _n] 1	9.624730398 -02
[⁻]	
[1]	
[x]	10.38990142
[log]	1.016611427
[⁻]	
[x]	1.016611427
10	10
[⁻]	
[⁼]	10.16611427

Decibels loss = 10.17 to 2 decimal places.

5. Numerical Integration

Solve $\int_1^3 \frac{1}{x} dx$ = Using the trapezoidal rule.

x	1	1.5	2	2.5	3
y	y ₁	y ₂	y ₃	y ₄	y ₅

Solution:

Enter as follows:

KEY ENTRY	DISPLAY	EXPLANATION
1	1	x ₁

KEY ENTRY	DISPLAY	EXPLANATION
$x \leftrightarrow y$	0	
1	1	y_1
$1/x$	1	
$ $	0	
1.5	1.5	x_2
$x \leftrightarrow y$	0	
1.5	1.5	
$1/x$	0.666666666	y_2
\int	0.416666666	
2	2	x_3
$x \leftrightarrow y$	0	
2	2	
$1/x$	0.5	y_3
\int	0.708333333	
2.5	2.5	x_4
$x \leftrightarrow y$	0	
2.5	2.5	y_4
$1/x$	0.4	
\int	0.933333333	
$\sqrt{3}$	3	x_5
$x \leftrightarrow y$	0	
3	3	
$1/x$	0.333333333	y_5
$ $	1.116666667	$x_5 \int 1/x dx$
		x_1

Therefore $\int_{1}^{3} 1/x dx = 1.12$ using the trapezoidal rule.

Note: (1) The correct answer is $[\ln x]_1^3 = \ln 3 - 0 = 1.0986$

(2) Clear memory registers by depressing **F CA** before starting a numerical integration.

6. Complex Arithmetic

The current in a circuit is given by $(5.2 + j13)$ A when applied voltage is $(100 + j150)$ volts. Determine the impedance stating whether it is inductive or capacitive.

Solution:

Impedance = v/amperes

KEY ENTRY	DISPLAY	EXPLANATION
	100	100
$x \leftrightarrow y$	0	
	150	150
F $j \div$	150	
	5.2	5.2
$x \leftrightarrow y$	0	
	13	13
=	12.5994695	real part of \triangle impedance
$x \leftrightarrow y$	-2.652519894	imaginary part of \triangle impedance

The impedance is $(12.60 - 2.65j)$ ohms.

Since the imaginary part is negative, the impedance is capacitive.

- 7. Percentage (%) example on Tax Add-on**
 An automobile retails for \$5,200. If the sales tax is 6%, what is the dollar amount of the tax? What is the total cost of the car?

Solution:

Enter as follows:

KEY ENTRY	DISPLAY	EXPLANATION
5200	5200	
<input type="button" value="+"/>	5200	
6	6	
<input type="button" value="F"/> <input type="button" value="%"/>	312	\$ amount of tax
<input type="button" value="="/>	5512	total cost of the car

The amount of sales tax is \$312.
 The total cost of the car is \$5,512.

8. Percent Difference

A man invests \$4,500 in the stock market. Six months later he sells his stock for \$6,200. What is the return on his investment.

Solution:

Enter as follows:

KEY ENTRY	DISPLAY
4500	4500
<input type="button" value="x↔y"/>	0
6200	6200
<input type="button" value="F"/> <input type="button" value="Δ%"/>	37.7777778

The investor has realized a 37.8% return on his money.

9. Permutation

Given 15 students in a class and 6 desks in the front row, how many arrangements of students in all front row seats are possible?

Solution:

$$P_m^n \text{ where } n = 15 \text{ and } m = 6$$

Enter as follows:

KEY ENTRY	DISPLAY
15	15
<input type="button" value="x↔y"/>	15
6	6
<input type="button" value="β"/>	6
<input type="button" value="P_m^n"/>	3603600

Therefore, 3,603,600 arrangements are possible.

10. Combination

How many different bridge hands are there? Bridge is played with a 13 card hand dealt from 52 cards.

Solution:

$$\text{hands} = C_m^n \text{ where } n = 52, m = 13$$

Enter as follows:

KEY ENTRY	DISPLAY
52	52
<input type="button" value="x↔y"/>	52
13	13
<input type="button" value="β"/>	13

KEY ENTRY DISPLAY

$\frac{C^n}{m}$ 6.350135594 11

Therefore, there are $6.350135594 \times 10^{11}$ hands in bridge.

11. Poisson Density Function

A switchboard operator receives 48 calls during 8 hours. What is the probability of getting 2 calls during 10 minutes?

Solution:

$$\text{We have } \lambda = \frac{48}{8 \times 60} = 0.1 \text{ call/minute}$$

Or $\lambda = 1 \text{ call/10 minutes}$

The probability is POISS (k)

$$= \frac{e^{-\lambda} \lambda^k}{k!}$$

where k = 2 and $\lambda = 1$

Enter as follows:

KEY ENTRY DISPLAY

2 2
 α 2
 1 1
 POISS 0.18393972

The probability of getting 2 calls/10 minutes is 0.184.

12. Binomial Distribution

Find the probability of getting exactly 2 heads in 6 tosses of a fair coin.

Solution:

$$P(k) = C_k^n p^k q^{n-k} \text{ where } n = 6, k = 2 \text{ and } p = q = 0.5$$

KEY ENTRY DISPLAY

6 6
 α 6
 2 2
 B 2
 .5 0.5
 BINOM 0.234375

Probability of obtaining 2 heads = 0.234

13. Exponential Distribution

The probability of failure of an electronic device P = 3% per 6 weeks, operating hours. What is the probability for one device not to fail before 3 years?

Solution:

The probability is given by e^{-nP} with n expressed in weeks. The key sequence is:

Enter as follows:


KEY ENTRY DISPLAY EXPLANATION

3 3
 x 3

KEY ENTRY	DISPLAY	EXPLANATION
52	52	
\div	156	n
6	6	
\times	26	
3	3	
\div	78	
100	100	
=	0.78	np
$+/-$	-0.78	
F, e^x	0.458406011	

The probability for one device not to fail before 3 years is 0.458.

14. Gaussian Distribution

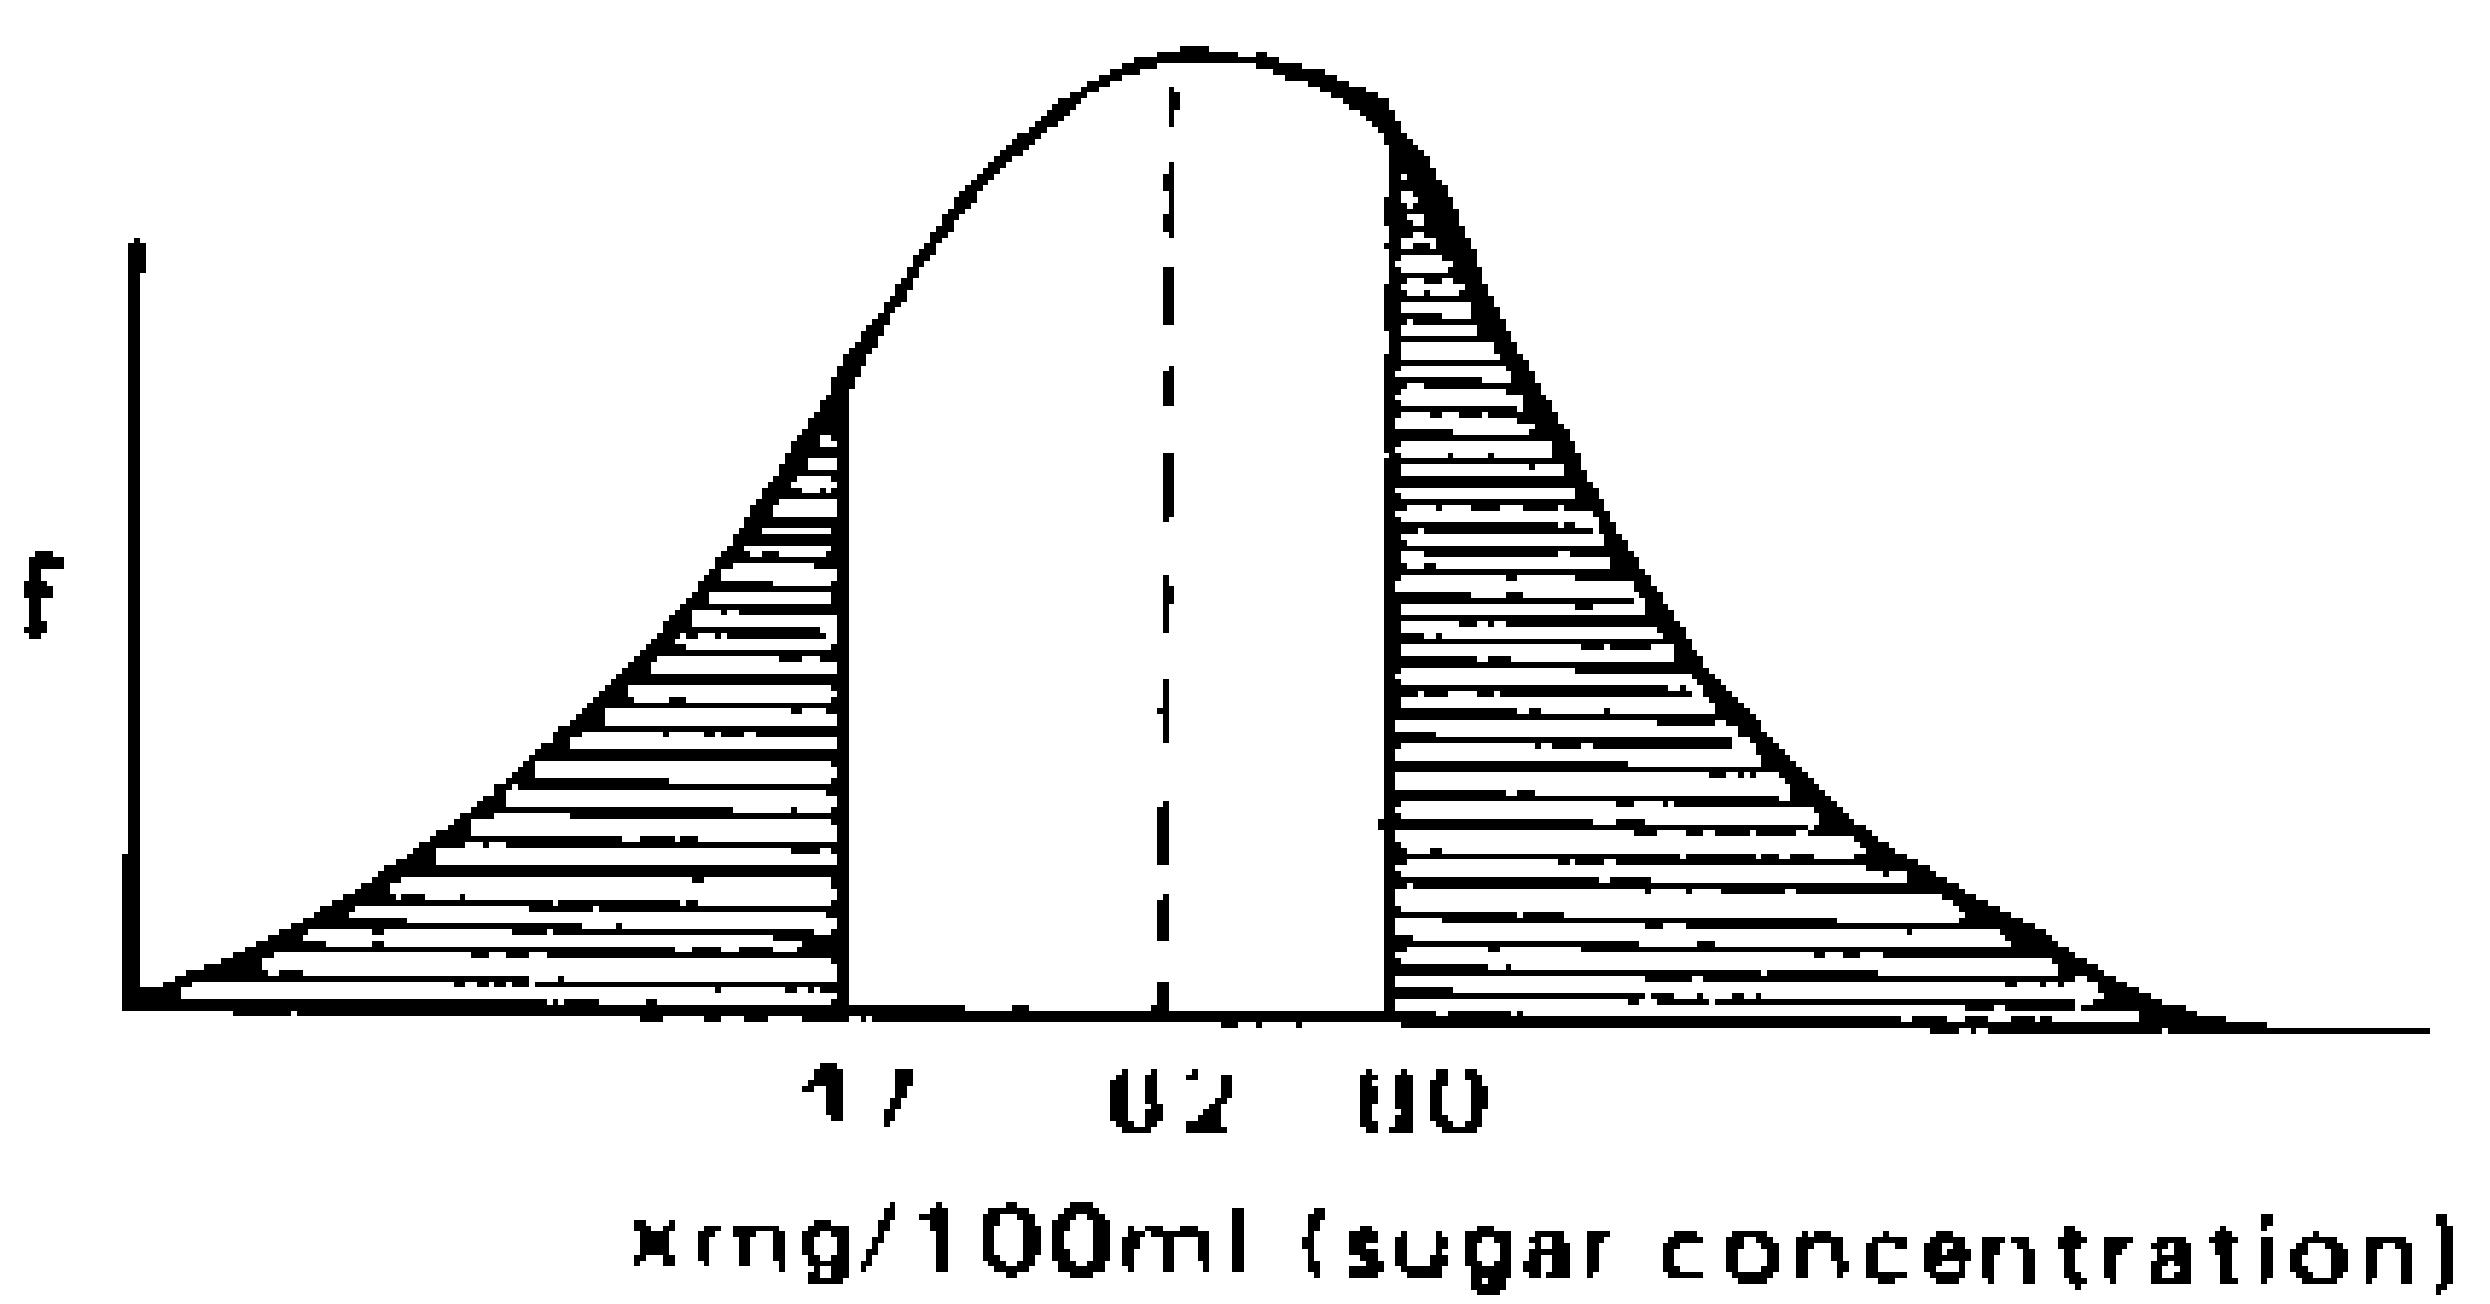

Calculate proportions of a normal distribution of sucrose concentrations, where $\mu = 62 \text{ mg}/100\text{ml}$ and $\sigma = 21 \text{ mg}/100\text{ml}$.

a) What proportion of the population is greater than 80mg/100ml?

b) What proportion of the population is less than 47mg/100ml?

c) What proportion lies between 47mg/100ml and 80mg/100ml?

a) Solution:

We have to find z and then find p
 $P(x_1 > 80\text{mg}/100\text{ml}) = P(z > \quad)$
 using the gaussian distribution.

$$z = \frac{x_1 - \mu}{\sigma}$$

Enter as follows:

KEY ENTRY DISPLAY

80	80
$\bar{-}$	80
62	62
\div	18
21	21
=	0.857142857
F, GAUSS	0.80431703
$\bar{+}$	-0.80431703
+	-0.80431703
1	1
-	0.195682969
STO _n , 1	0.195682969

The proportion of the population greater than 80mg/100ml is 0,196.

b) Solution:

to find the proportion that lies less than 47 mg/100 ml, enter as follows:
i.e. $P(x_i < 47 \text{ mg/100 ml})$

KEY ENTRY DISPLAY

47 47

- 47

62 62

÷ -15

21 21

= .0.714285714

F GAUSS 0.237525262

The proportion of the population less than 47 mg/100 ml is 0.238.

c) Solution:

to find the proportion that lies between 47 mg/100 ml and 80 mg/100 ml)

$$P(47 \text{ mg/100 ml} < x < 80 \text{ mg/100 ml}) \\ = 1 - P(x_i > 80 \text{ mg/100 ml}) - P(x_i < 47 \text{ mg/100 ml})$$

Enter as follows:

KEY ENTRY DISPLAY EXPLANATION

0.237525262 0.237525262 result from (b)

+Mn 1 0.237525262

KEY ENTRY DISPLAY EXPLANATION

- 1


RMn 1 0.433208231

= 0.566791768

Therefore, the proportion that lies between 47 mg/100 ml and 80 mg/100 ml is 0.567.

15. **Error Function on Heat Conduction Using Gaussian Distribution**

A very long insulated iron pipe at -40°C is heated to 100°C at one end so that a constant temperature is maintained at that end. Find the temperature 3 meters from the heated end after 15 hours.

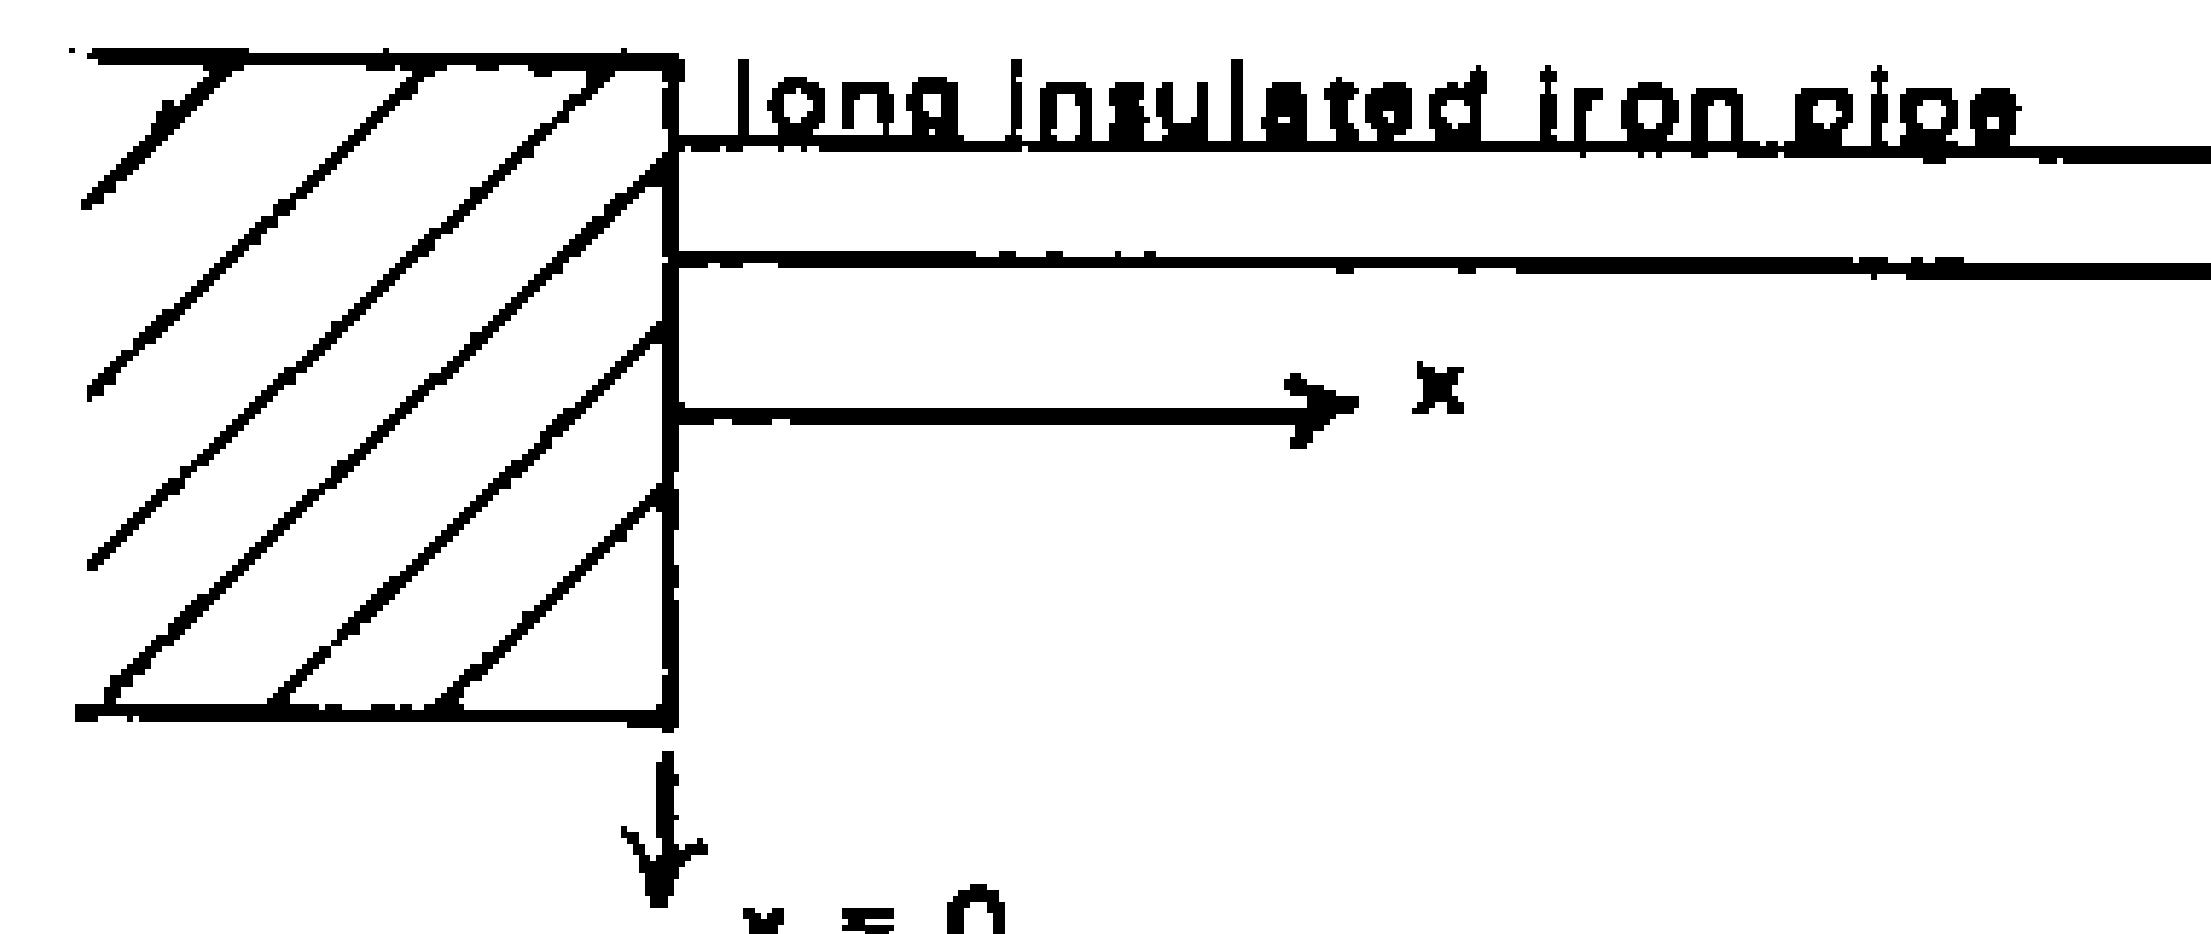

The unknown temperature is a function θ of distance "x" and time "t".

The initial conditions are:

$$(1) \text{ at time } t = 0, \theta(x, 0) = 40^\circ\text{C}$$

$$(2) \text{ at distance } x = 0, \theta(0, t) = 100^\circ \text{ for } t > 0$$

$$(3) \text{ in general, } \theta(x, t) = (100 - T_i)x \left\{ 1 - \operatorname{erf} \left[\frac{x}{2\sqrt{T}} \right] \right\} + T_i \text{ where } T_i \text{ is the initial temperature.}$$

$$\text{Since } \operatorname{erf}(z) = \frac{2}{\sqrt{\pi}} \int_0^z e^{-t^2} dt = 2 \operatorname{erf}(\frac{z}{\sqrt{2}}) - 1,$$

we can use the Gaussian distribution function to find $\theta(x,t)$ for $x = 3$ meters and $t = 15$ hours. Using the relationship and transforming the data, we obtain:

$$\theta(x,t) = 2(100 - T_i) \left[1 - \frac{e^{-\frac{x}{a\sqrt{2t}}}}{\sqrt{2\pi}} \right] + T_i$$

Data: $a = 4.71 \times 10^{-3}$ m/ $\sqrt{\text{sec}}$ for iron

$T_i = -40^\circ\text{C}$

$x = 3$ meters

$t = 15$ hours
Enter as follows:

KEY ENTRY	DISPLAY	EXPLANATION
15 [x]	15	
60	60	
[x]	900	
60	60	
[x]	54000	t in seconds
2	2	
=	108000	
[F] \sqrt{x}	328.6335345	
[x]	328.6335345	
.477 [EE] 2 [+/-] .477 -.02	a for iron in m/ $\sqrt{\text{sec}}$	
=	1.66768196	
[1/X]	0.637925177	
[X] 3	3	

KEY ENTRY	DISPLAY	EXPLANATION
=	1.913775533	
[F] GAUSS	0.972175578	
[+/-]	-0.972175578	
[+] 1	1	
[X] 2	2	
X	5.564884308-02	
(())	5.564884308-02	
100 [+]	100	
40	40	
(())	140	
=	7.790838031	
[-] 40	40	
=	32.20916197	
	Answer Temperature = -32.20916197	
16. Using the Exchange Key $x \leftrightarrow y$		
	Find $3^{\ln 2} + \sin 30$	
KEY ENTRY	DISPLAY	
2	2	
[ln]	0.69314718	
[+]		
30	30	
[sin]	0.5	

KEY ENTRY

DISPLAY

1.193147181

3

3

1.193147181

$$\therefore 3^{\ln 2 + \sin 30} = 3.709162666$$

17. Using $\ln\Gamma(x)$ [natural log of gamma function] to find $120!$

Solution: By using the relationship $n! = \Gamma(n+1)$, we can find

$\Gamma(121)$ to give $120!$

$$[\ln\Gamma(121) - 10^{99}\ln - 10^{50}\ln]$$

KEY ENTRY

DISPLAY

121

121

457.812388

457.812388

99

1. 99

227.9559242

229.8564638

By trial & error
find that it is over-
loaded

229.8564638

50

1. 50

115.1292547

114.7272091

KEY ENTRY

DISPLAY

EXPLANATION

6.68950291 49

$$\therefore 120! = 6.6895 \times 10^{49} \times 10^{99} \times 10^{50}$$

$$= 6.69 \times 10^{198}$$

18. Solving definite integral of $\sin^4 u$ using Gamma function

Solve: $\int_0^{\pi/2} \sin^4 u du$

We can solve the problem by the use of
the following relationship:

$$\int_0^{\pi/2} \sin^n u du = \frac{\sqrt{\pi}}{2} \frac{\Gamma(\frac{n-1}{2})}{\Gamma(\frac{n+2}{2})} \quad n > -1$$

in this case $n = 4$

$$\int_0^{\pi/2} \sin^4 u du = \frac{\sqrt{\pi}}{2} \frac{\Gamma(1.5)}{\Gamma(3)}$$

Enter as follows:

KEY ENTRY

DISPLAY

EXPLANATION

3

3

0.69314718

2

0.5

0.5

3.141592654

1.772453851

2

0.886226

0.443113462

n 1

0.443113462

KEY ENTRY	DISPLAY	EXPLANATION
1.5	1.5	
$\int_0^{\pi/4} \sin^4 u du$	0.120782237	
e^x	0.886226925	
X	0.886226925	
R Mn 1	0.443113462	
=	0.392699081	
$\int_0^{\pi/4} \sin^4 u du = 0.393$		

19. Linear Regression Example

The frequency of electrical impulses emitted is measured from fish at different temperatures. Find the slope and intercept relating impulse frequency to temperature. Also, predict the impulse frequency if the temperature of the fish is 15°C.

The following data is provided:

TEMPERATURE (°C), X	IMPULSE FREQUENCY (number/sec), Y
20	222
22	254
23	274
25	292
27	309
28	314
30	328

Solution: Enter as follows:	KEY ENTRY	DISPLAY
	20	20
	x_i	20
	222	222
	y_i	1
	22	22
	x_i	22
	254	254
	y_i	2
	23	23
	x_i	23
	274	274
	y_i	3
	25	25
	x_i	25
	292	292
	y_i	4
	27	27
	x_i	27
	309	309
	y_i	5
	28	28

KEY ENTRY**DISPLAY**

<input type="checkbox"/> x_i	28
314	314
<input type="checkbox"/> y_i	6
30	30
<input type="checkbox"/> x_i	30
328	328
<input type="checkbox"/> y_i	7
<input type="checkbox"/> F Slope	10.26315789
<input type="checkbox"/> F intcp	28.13533835
15 <input type="checkbox"/> \hat{y}	182.0827068

Therefore, the regression equation is:

$$\hat{y} = 10.263x + 28.135$$

where $b = 10.263$ impulses/sec/ $^{\circ}\text{C}$

$a = 28.135$ impulses/sec

The predicted impulse frequency if the temperature is 15°C is 182.08 impulses/sec.

Note: Memory registers must be cleared before entering first datum.

20. Mean and Standard Deviation

A group of 10 experimental animals consists of individuals with the following body weights (in grams): 85.5, 86.5, 82.4, 89.7, 72.2, 78.4, 69.9, 78.9, 77.3, 86.2.

- a) Calculate the mean weight of these animals.
 b) Find the precision of the measurement (i.e. the unbiased standard deviation).
Solution:

Enter as follows:

KEY ENTRY**DISPLAY**

<input type="checkbox"/> x_n	85.5
<input type="checkbox"/> x_n	86.5
<input type="checkbox"/> x_n	82.4
<input type="checkbox"/> x_n	89.7
<input type="checkbox"/> x_n	89.7
<input type="checkbox"/> x_n	72.2
<input type="checkbox"/> x_n	78.4
<input type="checkbox"/> x_n	78.4
<input type="checkbox"/> x_n	69.9
<input type="checkbox"/> x_n	69.9

KEY ENTRY DISPLAY

78.9	78.9
$\boxed{x_n}$	78.9
77.3	77.3
$\boxed{x_n}$	77.3
86.2	86.2
$\boxed{x_n}$	86.2
\bar{x}	80.7
$\boxed{F} \ S$	6.496152708

- a The mean weight of the animals is 80.7 gms.
 b The precision of the measurements is 6.50 gms.

APPENDIX A

Error Conditions

An error condition results when an improper operation is performed or when the result of an operation overflows or underflows the absolute range of the calculator.

When an error condition occurs, the word "ERROR" is displayed on the calculator. To clear ERROR from display, depress $\boxed{C/CE}$.

Overflow

Overflow occurs when a computed result is greater than $9.999999999 \times 10^{99}$.

Underflow

Underflow occurs when a computed result is less than 1.0×10^{-99} .

APPENDIX B

Operating Accuracy

The precision of your calculator depends upon the operation being performed. Basic addition, subtraction, multiplication, division and reciprocal assignments have a maximum error of + one count in the tenth or least significant digit.

While countless computations may be performed with complete accuracy, the accuracy limits of particular operations depend upon the input argument as shown below.

Function	Input Argument	Mantissa Error (Max.)
$\boxed{F} \ \sqrt{x}$		2 counts in D_{10}
$\boxed{\ln} \ x$		1 count in D_{10}
$\boxed{\log} \ x$		1 count in D_{10}
$\boxed{F} \ e^x$		3 counts in D_{10}
$\boxed{\sqrt{x}}$		1 count in D_9
$\boxed{\sin} \ \phi$	$0^\circ \leq \phi \leq 360^\circ$ or $0 \leq \phi \leq 2\pi$	8 counts in D_{10}
$\boxed{\cos} \ \phi$	$0^\circ \leq \phi \leq 360^\circ$ or $0 \leq \phi \leq 2\pi$	8 counts in D_{10}
$\boxed{\tan} \ \phi$	$0 \leq \phi < 89^\circ$ $89^\circ \leq \phi \leq 89.95^\circ$	4 counts in D_9 1 count in D_6
$\boxed{F} \ \sin^{-1} x$	$10^{-10} \leq x \leq 1$	$E < 5 \times 10^{-8}$
$\boxed{F} \ \cos^{-1} x$	$10^{-10} \leq x \leq 1$	$E < 5 \times 10^{-8}$
$\boxed{F} \ \tan^{-1} x$		$E < 5 \times 10^{-8}$
	Linear regression (alt. linear regression parameters)	5 counts in D_{10}

Name	Parameters	Probability Mass Function	Mean	Variance	Moment Generating Function
Binomial	n a positive integer, $0 \leq p \leq 1$	$C_p^k p^k (1-p)^{n-k}$	np	$np(1-p)$	$(pe^t + 1 - p)^n$
Poisson	$\lambda > 0$	$\frac{e^{-\lambda} \lambda^x}{x!}$ $x = 0, 1, \dots$	λ	λ	$e^\lambda (e^t - 1)$
Hypergeometric	n, V_1, V_2 Positive integers $n \leq V_1 + V_2$	$\frac{C_{V_1}^v C_{V_2}^{n-v}}{C_n^n}$	$\frac{nV_1}{V_1 + V_2}$	$\frac{V_1 V_2 n (V_1 + V_2 - n)}{(V_1 + V_2)^2 (V_1 + V_2 - 1)}$	$\left(\frac{C_{V_1}^v}{V_1 + V_2}\right)^n$
Normal or Gaussian	$-\infty < \mu < \infty$ $\sigma > 0$	$\sqrt{2/\pi} e^{-(x-\mu)^2/2\sigma^2}$	μ	σ^2	$F(-n, -V_1; V_1 - n; e^t)$ $e^{\mu t + (\sigma^2 t^2)/2}$
Chi Square or χ^2	v is a positive integer (degrees of freedom)	$\frac{x^{v/2-2}}{2^{v/2} \Gamma(v/2)}$	v	$2v$	$(1-2t)^{-v/2}$
F or Snedecor's F	and positive integers (degrees of freedom)	$\frac{\Gamma(\frac{v_1+v_2}{2})(\frac{v_1}{2})^{v_1/2} x^{\frac{v_1-2}{2}}}{\Gamma(\frac{v_2}{2})\Gamma(\frac{v_1}{2})(1+\frac{v_1}{v_2}x)^{\frac{v_1+v_2}{2}}}$	$\frac{v_2}{v_1+V_2} x$	$\frac{2^{v_1/2}(v_1+v_2-2)}{v_1(v_2-2)^2(v_2-4)}$	
t or Student's t	positive integer (degrees of freedom)	$\frac{\Gamma(\frac{v-1}{2})}{\sqrt{\pi} v^{(1+v)/2}}$	$0 < v < 1$	$\frac{v}{v-2} < v < 2$	

† or Student's t

(degrees of freedom)

$$\frac{\Gamma(\frac{v-1}{2})}{\sqrt{\pi} v^{(1+v)/2}}$$

Appendix C Table 1. Discrete and Continuous Probability Distribution Laws.

Function	Input Argument	Mantissa Error (Max.)
Mean and Standard Deviation		6 counts in D ₁₀
Combination n,m positive & Integers ($n \geq m$)		1 count in D ₉
Permutation, Binomial, Poisson and Gaussian Distributions		
nl	$n < 69$	6 counts in D ₁₀
In $\Gamma(x)$	Positive	6 counts in D ₁₀
Cosh y		
Sinh y		1 count in D ₁₀
tanh y		
Cosh ⁻¹ y		6 counts in D ₁₀
Sinh ⁻¹ y		
tanh ⁻¹ y		
Complex arithmetic		1 count in D ₁₀
$\Delta\% \quad \%$		1 count in D ₁₀

Dn = Nth display assuming a left justified 10 digit result.

APPENDIX D.

Useful Formulas and Topics

Hyperbolic Functions

$$\cosh u \pm \sinh u = e^{\pm u}$$

$$\cosh^2 u - \sinh^2 u = 1$$

$$\sinh(a+jb) = \sinh a \cosh b + j (\cosh a \sinh b)$$

$$\cosh(a+jb) = \cosh a \cosh b + j (\sinh a \sinh b)$$

hyperbolic (jb) = j trigonometric (b)

$$\begin{aligned}\operatorname{Arc \tanh}(a+jb) &= \frac{1}{2} \operatorname{Arc \tanh} \frac{2a}{1+a^2+b^2} + \\ &\quad \frac{j}{2} \operatorname{Arc \tan} \frac{2b}{1-a^2-b^2}\end{aligned}$$

Factorial of Even Numbers

$$(2n)! = 2 \cdot 4 \cdot 6 \cdots 2n = 2^n n!$$

Factorial of odd Numbers

$$(2n-1)! = 1 \cdot 3 \cdot 5 \cdots (2n-1) = \frac{1}{\sqrt{\pi}} 2^n \Gamma\left(n + \frac{1}{2}\right)$$

Gamma and Beta Functions

$$\Gamma(n+1) = n! \Gamma(n) = n!$$

$$B(x,y) = \frac{\Gamma(x)\Gamma(y)}{\Gamma(x+y)}$$

Error Function

$$Erf(x) = \int_0^x e^{-t^2} dt = \frac{x}{\sqrt{2}} (x \sqrt{2}) - 1$$

Binomial Coefficients

$$(1+x)^n = \sum_{r=0}^n C_r^n x^r \quad n \geq 0$$

Combinations with Repetitions

The number of ways in which r indistinguishable particles can be distributed among n cells with no restrictions as to the number of particles permitted in any one cell is
in any one cell is: C_r^{n+r-1}

Multinomial coefficients

The number of ways in which a set of r elements can be partitioned into an ordered set of k subjects having r_1, r_2, \dots, r_k elements respectively with $\sum_1^k r_i = n$ is:

$$\frac{n!}{r_1! r_2! \cdots r_k!} = C_{r_1}^n \times C_{r_2}^{n-r_1} \times C_{r_3}^{n-r_1-r_2} \times \cdots \times C_{r_k}^{n-r_1-r_2-\cdots-r_{k-1}}$$

Matching

The number of ways in which n numbered elements can go into n numbered cells so that no element goes into a cell having the same number as the element is:

$$\frac{n!}{2!} - \frac{n!}{3!} + \frac{n!}{4!} - \cdots + (-1)^n (1 \cdot P_1^n + P_2^n - P_3^n + \cdots +$$

$$(-1)^n P_{n-2}^n$$

Negative Binomial Distribution

The probability of getting an mth success on the nth trial, each success having the probability p, is:

$$C_{m-1}^{n-1} \times p^m \times (1-p)^n$$

Hypergeometric Distribution (Sampling Without Replacement)

The probability of getting m success out of n trials out of a set containing a successes and b failures, each with an equal probability of being selected is:

$$\frac{C_m^a \times C_{n-m}^b}{C_n^{a+b}}$$

Useful Definite Integrals

$$\int_0^\infty \frac{\cosh 2yt}{(\cosh t)^{2x}} dt = 2^{2x-2} \frac{\Gamma(x+y)\Gamma(x-y)}{\Gamma(2x)}$$

Real $x > 0$ Real $y > /$ Real y

$$\int_0^{\pi/2} \cos^n \theta d\theta = \int_0^{\pi/2} \sin^n \theta d\theta = \frac{\sqrt{n}\Gamma(\frac{n+1}{2})}{2\Gamma(\frac{n+2}{2})}$$

Real $n > -1$

$$\int_0^{\pi/2} \cos^m \theta \sin^n \theta d\theta = \frac{1}{2} \frac{\Gamma(m+1)}{\Gamma(\frac{m+n+2}{2})} \Gamma\left(\frac{n+1}{2}\right)$$

$$\int_0^\infty \frac{dx}{a^2 + x^2} = \frac{\pi}{2} \text{ if } a > 0; = 0 \text{ if } a = 0; = \frac{\pi}{2} \text{ if } a < 0.$$

if $a < 0$






$$\int_0^\infty e^{-nx} \sqrt{x} dx = \frac{1}{2n} \sqrt{\frac{\pi}{n}}$$

$$\int_0^{\pi} \frac{\ln x}{1-x} dx = -\frac{\pi^2}{6}$$

$$\int_0^1 \frac{\ln x}{1+x} dx = -\frac{\pi^2}{12}$$

$$\int_0^1 (\ln x)^n dx = (-1)^n \cdot n!$$

Geometric Formulas

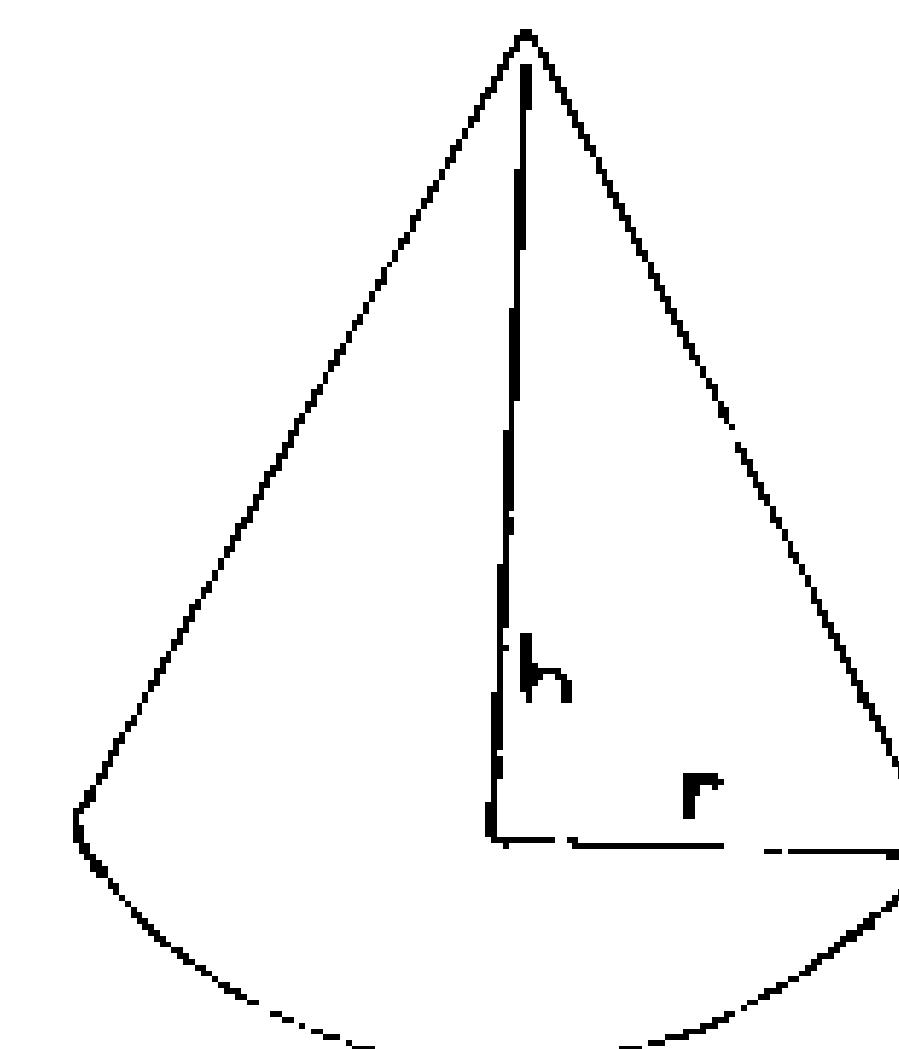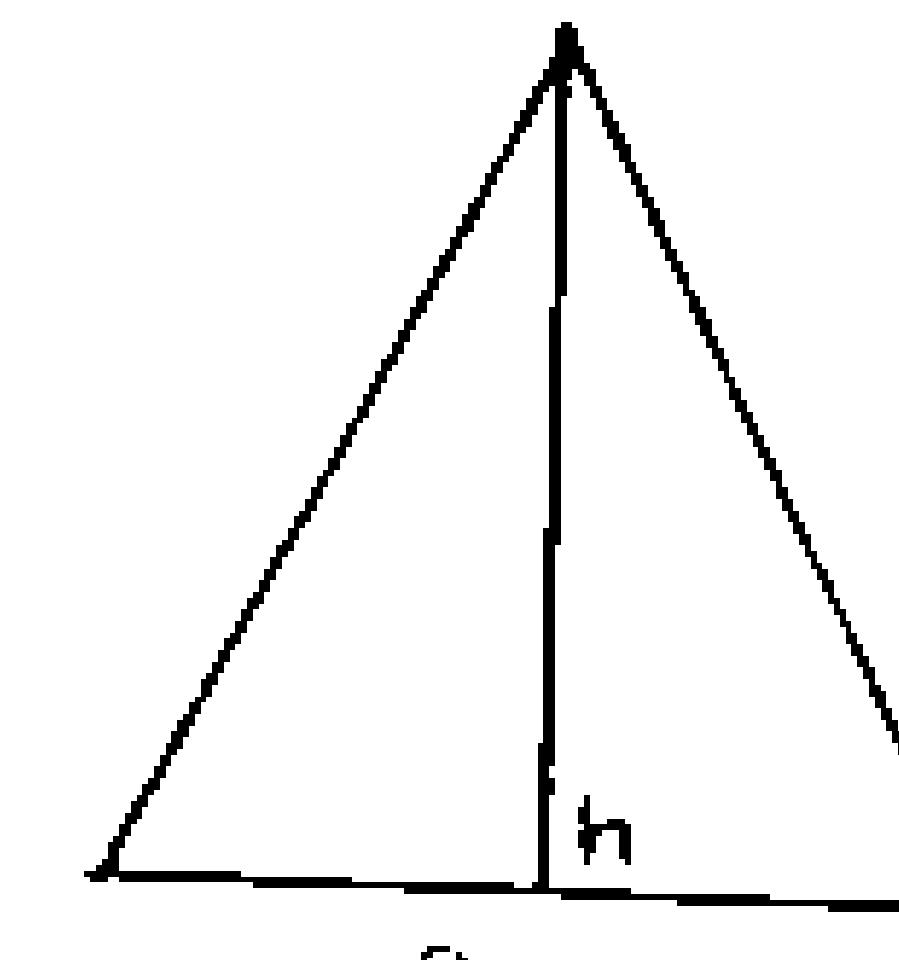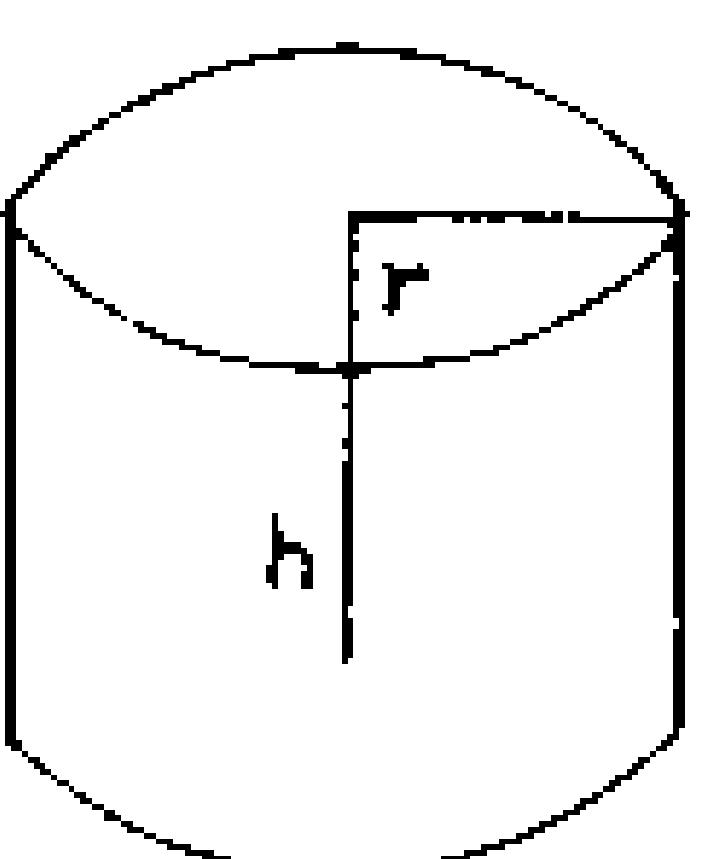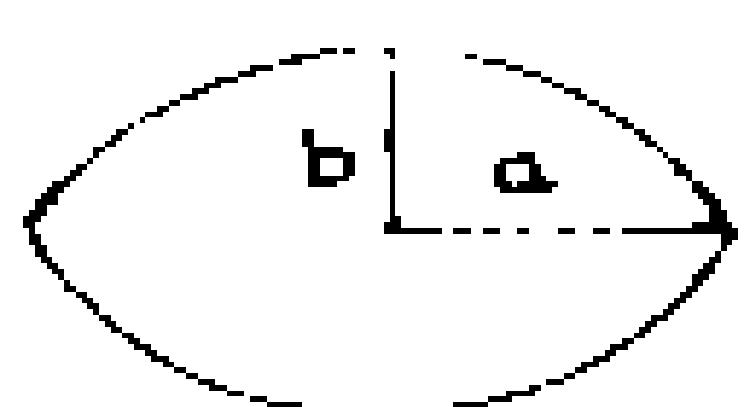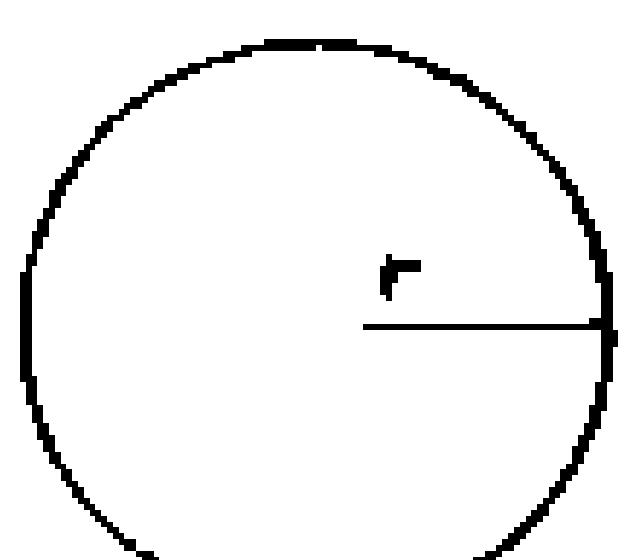

1. Circumference:

Circle $2\pi r$

2. Area:

Circle πr^2

Ellipse πab

Sphere $4\pi r^2$

Cylinder $2\pi r^2 + 2\pi rh(r+h)$

Triangle $\frac{1}{2} ah$

3. Volume:

Ellipsoid of Revolution $\frac{4}{3} \pi b^2 a$

Sphere $\frac{4}{3} \pi r^3$

Cylinder $\pi r^2 h$

Cone $\frac{\pi r^2 h}{3}$

II LINEAR REGRESSION

The simple linear regression equation is given as:

$$y_i = \alpha + \beta x_i$$

Let a, b be the estimates of α and β respectively.

$$\Sigma xy = (x_i - \bar{x})(y_i - \bar{y}) = \Sigma x_i y_i - \frac{(\Sigma x_i)(\Sigma y_i)}{N}$$

$$\Sigma x^2 = \Sigma (x_i - \bar{x})^2 = \Sigma x_i^2 - (\Sigma x_i)^2/N =$$

$$\Sigma y^2 = \Sigma (y_i - \bar{y})^2 = \Sigma y_i^2 - (\Sigma y_i)^2/N = \text{Total SS}$$

1) to slope $\frac{\sum xy}{\sum x^2} = \frac{\sum x_i y_i - (\sum x_i)(\sum y_i)}{N}$

$$\frac{\sum x_i^2 - (\sum x_i)^2}{N}$$

2) intercept a

$$a = \bar{y} - b\bar{x} \text{ where } \bar{x} = \frac{\sum x_i}{N} \text{ and } \bar{y} = \frac{\sum y_i}{N}$$

3) coefficient of determination r^2

$$r^2 = \frac{\left[\sum x_i y_i - \frac{\sum x_i \bar{y}}{N} \right]^2}{\left(\sum x_i^2 - \frac{(\sum x_i)^2}{N} \right) \left(\sum y_i^2 - \frac{(\sum y_i)^2}{N} \right)}$$

4) estimated value \hat{y} on the regression line
for any given x

$$\hat{y} = a + bx$$

5) Regression SS $\sim \frac{(\sum xy)^2}{\sum x^2} = \frac{\sum x_i y_i - (\sum x_i)(\sum y_i)}{\sum x_i^2 - \frac{(\sum x_i)^2}{N}}$

6) RSS = TSS - RegSS $= \sum (y_i - \hat{y})^2$

7) standard error of estimate of y on x

$$S_{y,x} = \sqrt{\frac{\sum (y_i - \hat{y})^2}{N-2}} = \sqrt{\frac{RSS}{N-2}}$$

8) standard error of the regression coefficient,
a (the intercept)

$$S_a = S_{y,x} \sqrt{\frac{\sum x_i^2}{N \sum x_i^2 - \frac{(\sum x_i)^2}{N}}} =$$

$$\sqrt{S_{y,x}^2 \left[\frac{\sum x_i^2}{N \sum x_i^2} \right]}$$

9) standard error of slope, b

$$S_b = \sqrt{\frac{S_{y,x}}{\sum x_i^2 - \frac{(\sum x_i)^2}{N}}}$$

10) Linear Regression Mean Square

$$\frac{\text{Reg SS}}{\text{Reg df}} = \frac{\text{Reg SS}}{1}$$

11) Residual Mean Square = $\frac{\text{RSS}}{\text{Residual df}}$

$$\frac{\text{RSS}}{N-2} = S_{y,x}^2$$

12) To test for $H_0: \beta = 0$ $F = \frac{\text{MS regression}}{\text{MS residual}}$

which is compared with the critical
value, $F_{\alpha; v_1, v_2}$ where $v_1 = \text{df regression} = 1$
 $v_2 = \text{df residual} = N-2$

13) standard deviation of the x values

$$S_x = \sqrt{\frac{\sum x_i^2 - \bar{x}^2}{N-1}}$$

14) standard deviation of the y values

$$S_y = \sqrt{\frac{\sum y_i^2 - \bar{y}^2}{N-1}}$$

APPENDIX E

INTERNATIONAL SYSTEM OF UNITS (SI) CONVERSION FACTORS

Conversion to Metric Measures

Symbol Given	Multiply by	To Obtain	Symbol
LENGTH			

in inches	25.4*	millimeters	mm
ft feet	30.48	centimeters	cm
yd yards	0.9144*	meters	m

Symbol Given	Multiply by	To Obtain	Symbol	Symbol Given	Multiply by	To Obtain	Symbol
LENGTH							
mi miles (statute)	1.609	kilometers	km	yd ³	cubic yard	0.7646	cubic meters m ³
nmi miles (Nautical)	1.852*	kilometers	km	bbl	barrels (US petrol) petrol)	0.1590	cubic meters m ³
micron	1.0*	micrometers	um	acre feet	1233.5	cubic meters m ³	
A° angstrom	0.1*	nanometers	nm				
AREA							
cmil circular mils.	0.0005067	sq. millimeters	mm ²	SPEED			
in ² square inches	6.452	sq. centimeters	cm ²	ft/min	feet feet per minute	5.080	millimeters per second
ft ² square feet	0.09290	sq. meters	m ²	mi/h	miles per hour	0.4470	meters per sec
yd ² square yards	0.8361	sq. meters	m ²	km/h	kilo- meters per hr.	0.2778	meters per sec
mi ² sq. miles (statute)	2.590	sq. kilometers	km ²	kn	knots	0.5144	meters per sec
acres	0.4047	hectares (10 ⁴ m ²)	ha	MASS			
VOLUME							
fl.oz. fluid ounces (US)	29.57	cubic cm (millimeters)	cm ³ or ml	oz ounces (avdp)		28.35	grams g
gal gallons (US liq)	3.785	liters	l	lb pounds (avdp)		0.4536	kilograms kg
gal gallons (Canada)	4.546	liters	l	ton short tons (2000 lbs)		0.9072	metric tons t (1000 kg)
in ³ cubic inches	16.39	cu centi- meters	cm ³	DENSITY			
ft ³ cubic feet	0.02832	cubic meters	m ³	lb./ft ³	pounds per cubic foot	16.02	kilograms per cubic meter kg/m ³
FORCE							
oz. ounces force				oz. ounces force		0.2780	newtons N
lb. pounds force				lb. pounds- force		4.448	newtons N

Symbol Given	Multiply by	To Obtain	Symbol
LENGTH			
kg. kilo- grams force	9.807	newtons	N
dyn. dynes	10^5	newtons	N
WORK, ENERGY, POWER			
ft-lb foot pounds force	1.356	joules	J
cal calorie (thermo chem)	4.184*	joules	J
Btu British thermal units (Int'l)	1055	joules	J
hp horsepower (elec.)	746	watts	W
ft-lbs/s foot pounds force per second	1.356	watts	W
Btu/h British thermal units per hour (Int'l)	0.2931	watts	W
PRESSURE			
lb/in ² pounds- force/ inch ²	6.895	kilopascals	kPa
lb/ft ² pounds- force/ foot ²	47.88	pascals	Pa
kg/m ² kilo- grams- force/ meter ²	9.807	pascals	Pa
mb millibars	100.0*	pascals	Pa

Symbol Given	Multiply by	To Obtain	Symbol
LENGTH			
mm Hg	milli- meters of Hg	133.3	pascals
m H ₂ O	inches 0.2491 of water (39')	kilopascals	kPa
m H ₂ O	feet of 2.989 water	kilopascals	kPa
LIGHT			
fc footcandles	10.76	lux	lx
fL footlamberts	3.426	candelas per sq. meter	cd/m ²
TEMPERATURE			
Symbol Given	Compute by	To Obtain	Symbol
'F Fahrenheit	(°F - 32) 5/9	'Celsius	'C
'C Celsius	'C + 32	"Fahrenheit	'F

*Indicates exact value. Omit when rounding.

Symbols for Quantities

Quantity	Qty. Symbol	SI Unit	Unit Symbol	Identical Unit
length	/	meter	m	
mass	m	kilogram	kg	
time	t	second	s	
frequency	f, ν	hertz	Hz	i/s
angular frequency	w	radian per rad/s sec		
area	A, S	sq. meter	m ²	
volume	V	cubic meter	m ³	

Quantity	Qty. Symbol	SI Unit	Unit Symbol	Identical Unit	PHYSICAL CONSTANTS	
velocity	v	meter per second	m/s		electronic charge e. 1.602×10^{-19} C speed of light in vacuum, c. 2.9979×10^8 m/s permittivity of vacuum, elec const. $\epsilon_0 = 8.854 \times 10^{-12}$ F/m	
acceleration (linear)	a	meter per sec ²	m/s ²		permeability of vacuum, mag const. $\mu_0 = 4\pi \times 10^{-7}$ H/m	
force	F	newton	N		Planck constant h. 6.626×10^{-34} J·s	
torque	T..M	newton meter	N·m		Boltzmann constant k. 1.38×10^{-23} J/K	
pressure	P	pascal	Pa	N/m ²	Faraday constant F. 9.649×10^4 C/mole	
temperature (absolute)	T...O			standard gravitational acceleration g. 9.807 m/s ²		
temperature (customary)	t..o	degree Celsius	°C		normal atmospheric pressure atm 101.3 kPa	
attenuation coefficient	α	neper per mtr			FACTOR	10^{12} tera T 10^1 deka da 10^{-6} micro μ
phase coefficient	β	radian per meter	rad/m		UNIT PREFIX	10^9 giga G 10^{-9} nano n
propagation coefficient	γ	reciprocal meter	m^{-1}		SYMBOL	10^6 mega M 10^{-1} deci d 10^{-12} pico p 10^3 kilo k 10^{-2} centi c 10^{-15} femto f 10^2 hecto h 10^{-3} milli m 10^{-18} atto a
radiant intensity	/	watt per steradian				
radiant flux	P ϕ	watt	W			
irradiance	E	watt per sq. meter	W/m ²			
luminous intensity	/	candela	cd			
luminous flux	ϕ	lumen	lm			
Illuminance	E	lux	lx	lm/m ²		

APPENDIX F

Rechargeable Battery

AC Operation

Connect the charger to any standard electrical outlet and plug the jack into the Calculator. After the above connections have been made the power switch may be turned "ON". (While connected to AC, the batteries are automatically charging whether the power switch is "ON" or "OFF")

Battery Operation

Disconnect the charger cord and push the power switch to "ON". With normal use a full battery charge can be expected to supply about 2 to 3 hours of working time.

When the battery is low, figures on display will dim. Do not continue battery operation this indicates the need for a battery charge. Use of the calculator can be continued during the charge cycle.

Battery Charging

Simply follow the same procedure as in AC operation. The calculator may be used during the charge period. However, doing so increases the time required to reach full charge. If a power cell has completely discharged the calculator should not be operated on battery power until it has been recharged for at least 3 hours, unless otherwise instructed by a notice accompanying your machine. Batteries will reach full efficiency after 2 or 3 charge cycles.

IMPORTANT -- Low Power

If battery is low

- a. Display will appear erratic
- b. Display will dim

c. Display will fail to accept numbers

If one or all of the above condition occur, you may check for a low battery condition by entering a series of 8's. If 8's fail to appear, operations should not be continued on battery power, Unit may be operated on AC power. See battery charging explanation. If machine continues to be inoperative see guarantee section.

CAUTION

A strong static discharge will damage your machine

Shipping Instructions:

A defective machine should be returned to the authorized service center nearest you.

See listing of service centers.

Temperature Range

Mode	Temperature C	Temperature °F
Operating	0° to 50°	32° to 122°
Charging	10° to 40°	50° to 104°
Storage	-40° to 55°	-40° to 131°

Use proper Commodore/CBM adapter-recharger for AC operation and recharging.

Adapter 640 or 707 North America

Adapter 708 England

Adapter 709 Continental Europe